
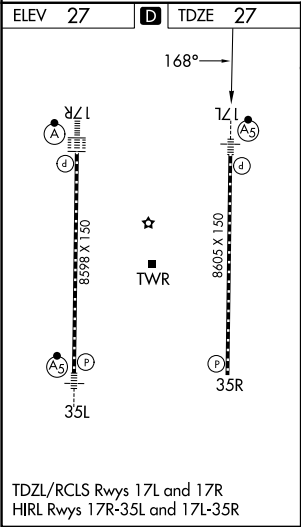


WAAS CH 78327 W17B	APP CRS 168°	Rwy Ldg TDZE Apt Elev 27 27	8605
--	------------------------	---	-------------

RNAV (GPS) Y RWY 17L
SACRAMENTO INTL (SMF)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct ORRCA and hold.
⚠ Circling NA west of Rwy 17L-35R. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV C/D visibility to RVR 5500.		

D-ATIS 126.75	NORCAL APP CON 125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	CAPITOL TOWER 125.7 256.7	GND CON 121.7 256.7
-------------------------	--	-------------------------------------	-------------------------------

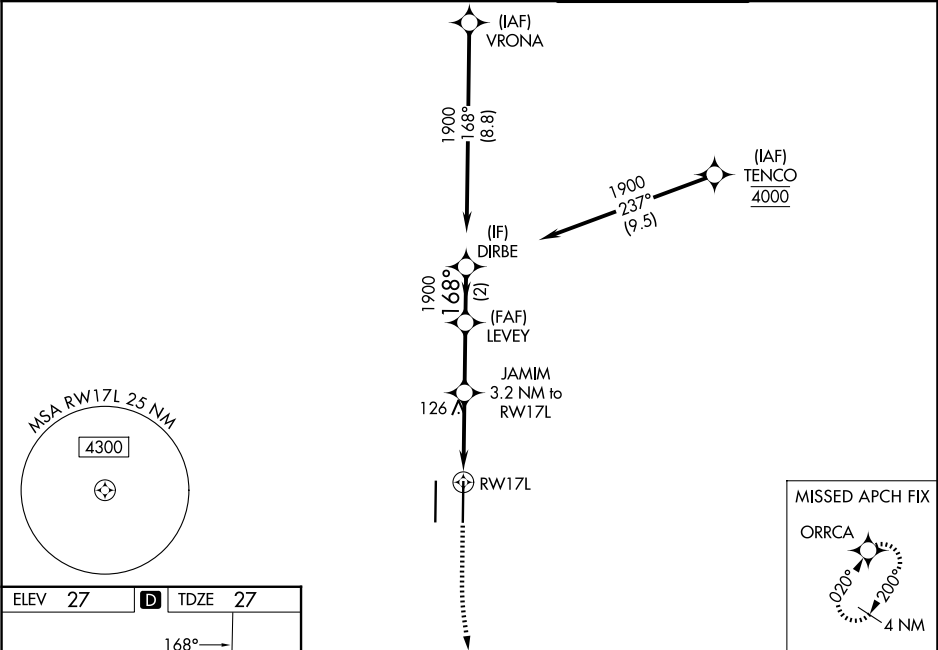

500	3000	ORRCA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 64°).	LEVEY	DIRBE
0.9 NM to RWY 17L		JAMIM 3.2 NM to RWY 17L	1900	168°	1900
0.9 NM		2.3 NM	2.5 NM	2 NM	GP 3.00° TCH 55
CATEGORY	A	B	C	D	
LPV DA	227/18		200 (200-½)		
LNAV/VNAV DA	277/24		250 (300-½)		
LNAV MDA	380/24		353 (400-½)		
CIRCLING	400-1 373 (400-1)	480-1 453 (500-1)	480-1½ 453 (500-1½)	840-2¾ 813 (900-2¾)	

SW-2, 09 JUL 2026 to 06 AUG 2026

SW-2, 09 JUL 2026 to 06 AUG 2026