

LOM RU	APP CRS	Rwy Ldg	5501
275	202°	TDZE	772
		Apt Elev	772

NDB RWY 20

MID-CAROLINA RGNL (RUQ)

▼



▲ NA

When local alimeter setting not received, use Lexington alimeter setting and increase all MDA 40 feet, increase S-20 Cats C and D, and Circling Cat C visibility ¼ SM and Circling Cat D ¼ SM. For inop ALS, increase Cat D visibility to 1⅞ SM. For inop ALS when using Lexington alimeter setting increase Cat D visibility to 2 SM.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 2500 direct ROVDY LOM and hold.

AWOS-3P 118.175	CHARLOTTE APP CON 128.325 307.8	UNICOM 122.725 (CTAF) 0
--------------------	------------------------------------	----------------------------

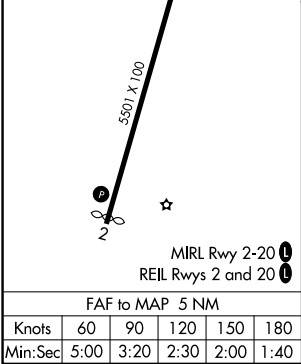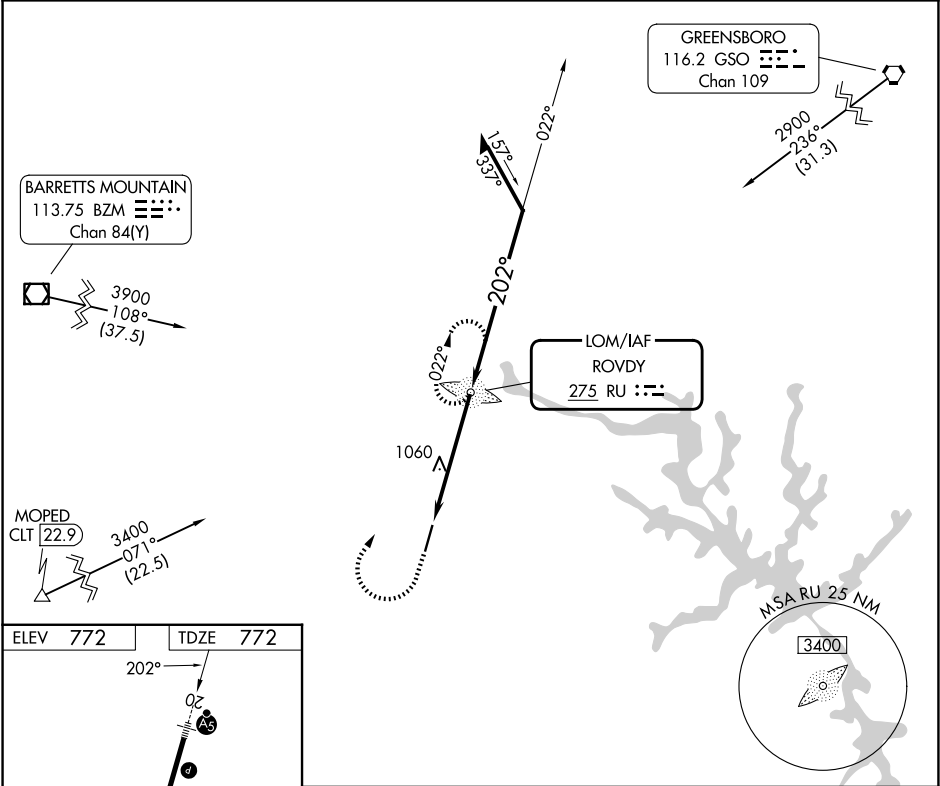

	1800	2500	RU	ROVDY RU LOM	6000	022°	Remain within 10 NM
					2500	202°	
						3.20° TCH 39	
						5 NM	
CATEGORY	A	B	C	D			
S-20	1420-¾ 648 (700-¾)		1420-1⅓ 648 (700-1⅓)				
CIRCLING	1420-1 648 (700-1)		1440-1⅞ 668 (700-1⅞)	1440-2 668 (700-2)			