


LOC/DME	I-OTI	APP CRS	Rwy Ldg
108.5		219°	2999
Chan 22			TDZE 172
			Apt Elev 172


LOC RWY 22

NEWPORT STATE (UUU)

▼ NA	When local altimeter setting not received, use Providence altimeter setting and increase all MDA 60 feet. Straight-in Rwy 22 NA at night, Circling Rwy 4, 22, 34 NA at night.	MISSED APPROACH: Climbing left turn to 2100 via PVD VOR/DME R-165 to NICOD INT/21.5 DME and hold.
--------------------------------------	---	---

ASOS 132.075	PROVIDENCE APP CON* 128.7 269.525	CLNC DEL 127.25	UNICOM 123.05 (CTAF) 0
-----------------	--------------------------------------	--------------------	---------------------------

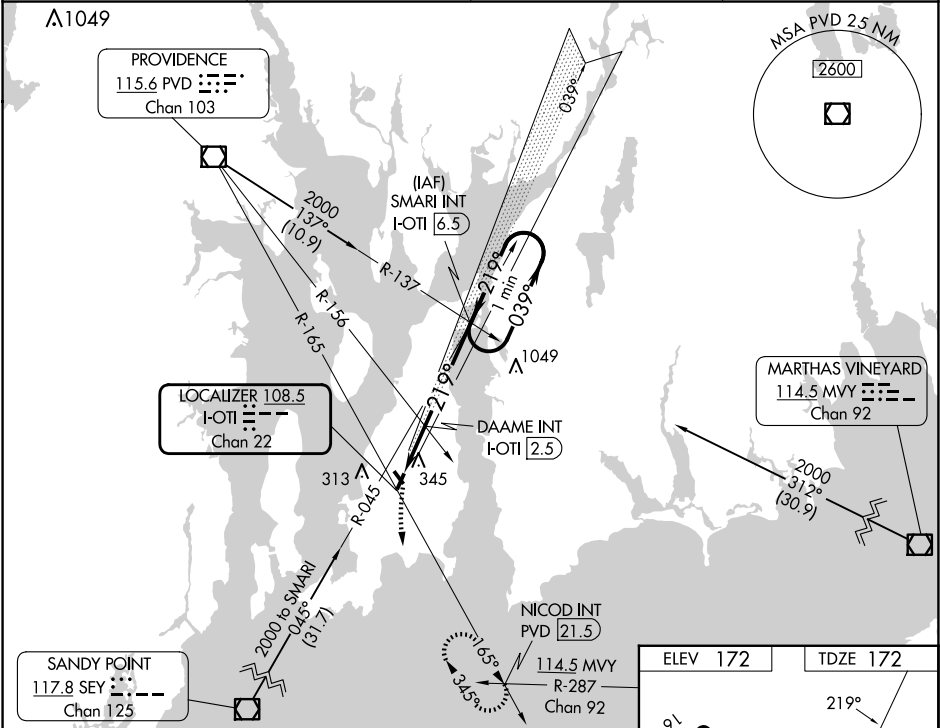

2100 PVD R-165	NICOD INT	DAAME INT I-OTI (2.5)	SMARI INT I-OTI (6.5)	One Minute Holding Pattern		
						
		* 780 when using Providence alimeter setting.				
CATEGORY	A		B		C	D
S-22	720-1 548 (600-1)		720-1 $\frac{5}{8}$ 548 (600-1 $\frac{5}{8}$)		NA	
CIRCLING	760-1 588 (600-1)		780-1 $\frac{3}{4}$ 608 (700-1 $\frac{3}{4}$)		NA	
DAAME FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)						
S-22	640-1 468 (500-1)		640-1 $\frac{1}{4}$ 468 (500-1 $\frac{1}{4}$)		NA	
CIRCLING	760-1 588 (600-1)		780-1 $\frac{3}{4}$ 608 (700-1 $\frac{3}{4}$)		NA	

