

LOC/DME I-FGH 109.35 Chan 30 (Y)	APP CRS 041°	Rwy Ldg 4775 TDZE 58 Apt Elev 72	ILS or LOC RWY 4 EASTON/NEWNAM FLD (ESN)
--	------------------------	---	---

RADAR and DME required for procedure entry. DME required for LOC only.


▼

▲

Circling Rwy 15, 33 NA at night. Autopilot coupled approach NA below 1000.

MISSED APPROACH: Climb to 2000 on heading 041° and on ATR VOR/DME R-283 to ORETE INT/ATR 31.6 DME and hold.

ATIS 124.475	POTOMAC APP CON 133.75 254.35	EASTON TOWER ★ 118.525 (CTAF) 0	GND CON 119.075
------------------------	---	---	---------------------------

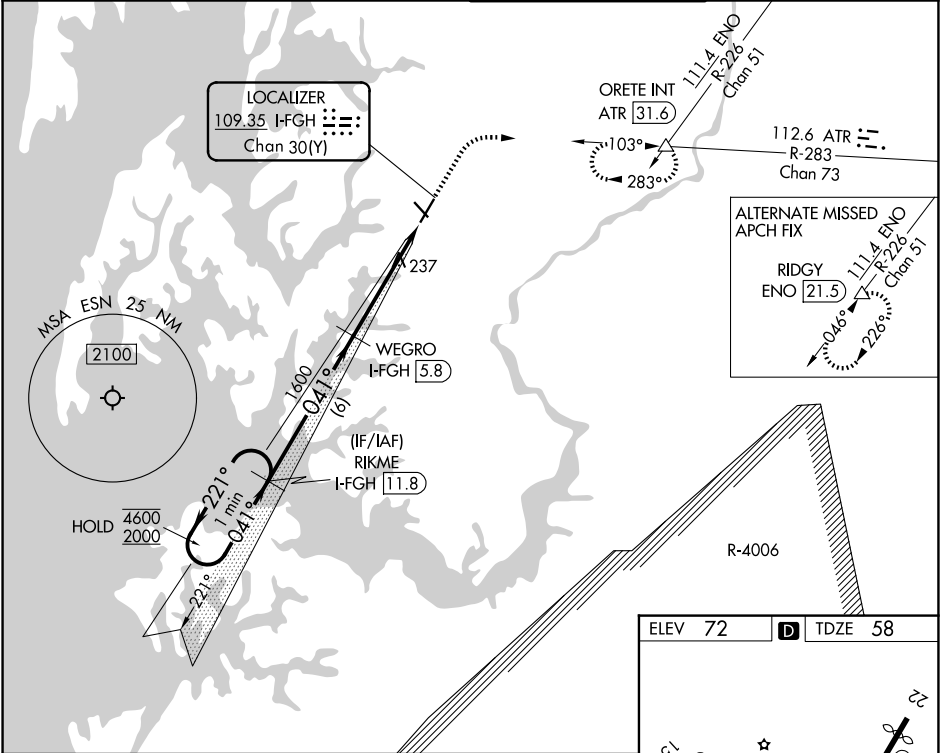

One Minute Holding Pattern

GS unusable below 600.

2000

ATR R-283

ORETE

4600

2000

GS 3.00° TCH 44

RIKME I-FGH 11.8

WEGRO I-FGH 5.8

I-FGH 2.5

I-FGH 1

1600

6 NM

3.4 NM

1.4 NM

* LOC only

CATEGORY	A	B	C	D
S-ILS 4		600-1 ⁵ / ₈	542 (600-1 ⁵ / ₈)	
S-LOC 4	540-1	482 (500-1)	540-1 ³ / ₈	482 (500-1 ³ / ₈)
CIRCLING	540-1 468 (500-1)	640-1 568 (600-1)	640-1 ¹ / ₂ 568 (600-1 ¹ / ₂)	740-2 ¹ / ₄ 668 (700-2 ¹ / ₄)

ELEV 72 D TDZE 58

6.0 0.5% UP

4000 X 100

5500 X 100

TWR

041°

0.7% UP

33

HIRL Rwy 4-22 0

REIL Rws 15, 22 and 33 0

MIRL Rws 15-33 0