

WAAS CH 86905 W04A	APP CRS 040°	Rwy Ldg TDZE 58 Apt Elev 72
--	------------------------	---

RNAV (GPS) RWY 4

EASTON/NEWNAM FLD (ESN)

RNP APCH - GPS.


▼

⚠

When local altimeter setting not received, use Cambridge altimeter setting; increase LPV DA to 303 feet, LNAV/VNAV DA to 670 feet and visibility ½ SM; increase all MDAs 60 feet and visibility LNAV Cat C/D and Circling Cat C ½ SM, and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Cambridge altimeter setting. Circling Rwy 15, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:
Climb to 700 then climbing right turn to 2000 direct ORETE and hold.

ATIS 124.475	POTOMAC APP CON 133.75 254.35	EASTON TOWER ★ 118.525 (CTAF) 0	GND CON 119.075
------------------------	---	--	---------------------------

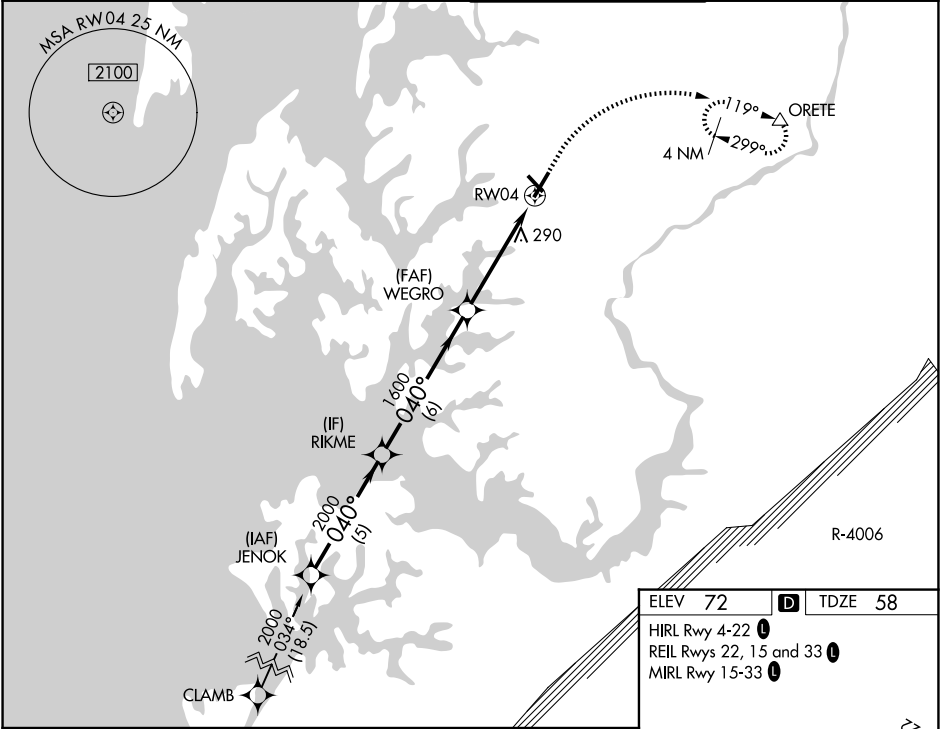

JENOK		RIKME		WEGRO		ORETE			
2000		2000		1600		700			
040°		040°		040°		040°			
GP 3.00°		TCH 44		1600		*1.6 NM to RW04			
5 NM		6 NM		3.1 NM		1.6 NM			
CATEGORY	A	B	C	D					
LPV DA	258-¾		200 (200-¾)						
LNAV/VNAV DA	625-1½		567 (600-1½)						
LNAV MDA	600-1		542 (600-1)		600-1½		542 (600-1½)		
CIRCLING	600-1		640-1		640-1½		740-2		
	528 (600-1)		568 (600-1)		568 (600-1½)		668 (700-2)		