



CHARLOTTE DEP CON
120.05 307.8
ASOS
135.775
CLNC DEL
132.55

TOP ALTITUDE:
3000

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TAKEOFF MINIMUMS
Rwys 5, 23: Standard.

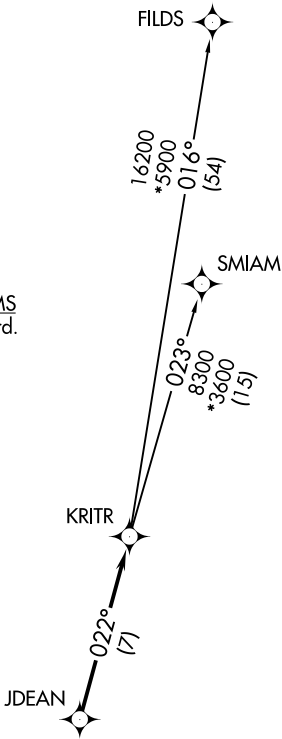

- NOTE: Turbojet only.
NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

NOTE: Chart not to scale.

T

DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC for RADAR vectors to JDEAN, then on track 022° to KRITR, then on assigned transition. Maintain 3000, expect filed altitude 10 minutes after departure.

FILDS TRANSITION (KRITR8.FILDS)
SMIAM TRANSITION (KRITR8.SMIAM)