



CHARLOTTE DEP CON 120.05 307.8 ASOS 135.775 CLNC DEL 132.55	RNAV 1 - DME/DME/IRU or GPS. RADAR required.	TOP ALTITUDE: 3000
--	---	-----------------------

TAKEOFF MINIMUMS
Rwys 5, 23: Standard.

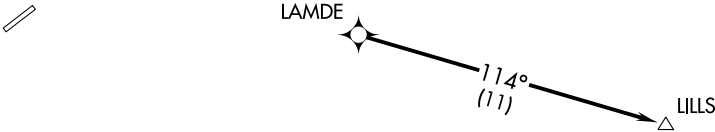

- NOTE: Turbojet only.
- NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.
- NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.

▼

DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC for RADAR vectors to LAMDE, then on depicted route to LILLS. Maintain 3000. Expect filed altitude 10 minutes after departure.