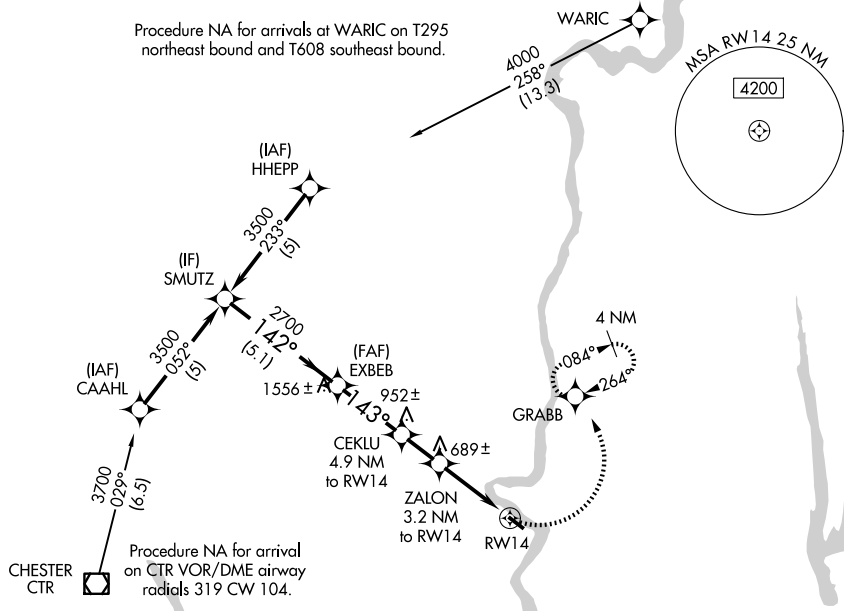



RNAV (GPS) RWY 14
NORTHAMPTON (7B2)

T Procedure NA at night. Obtain local altimeter setting on CTAF; when
A NA not received, use Windsor Locks altimeter setting. Rwy 14 helicopter
❄ -24°C visibility reduction below 1 SM NA.


MISSED APPROACH: Climbing left turn to 3000 direct GRABB and hold, continue climb-in-hold to 3000.

UNICOM
122.7 (CTAF) 

VGSI and descent angles not coincident (VGSI Angle 4.50/TCH 60).
 * 1820 when using Windsor Locks altimeter setting.
 ** 1260 when using Windsor Locks altimeter setting.

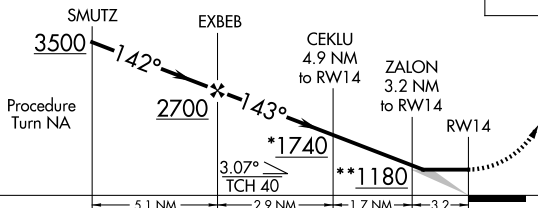

CATEGORY	A	B	C	D
LNAV MDA	940-1 819 (900-1)	940-1¼ 819 (900-1¼)		NA
CIRCLING	940-1¼ 819 (900-1¼)	1400-1½ 1279 (1300-1½)		NA
WINDSOR LOCKS ALTIMETER SETTING MINIMUMS				
LNAV MDA	1020-1¼ 899 (900-1¼)			NA
CIRCLING	1020-1¼ 899 (900-1¼)	1460-1½ 1339 (1400-1½)		NA

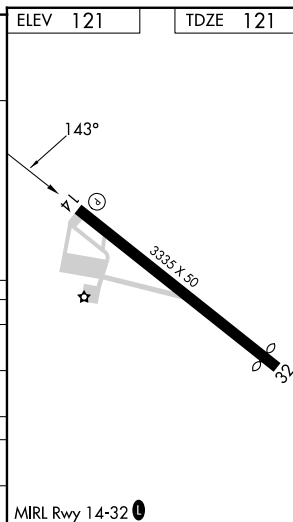

NE-1, 09 JUL 2026 to 06 AUG 2026