
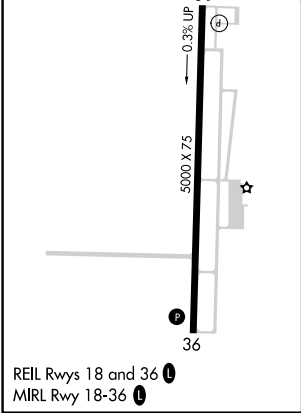


|         |          |      |
|---------|----------|------|
| APP CRS | Rwy Ldg  | 5000 |
| 179°    | TDZE     | 1316 |
|         | Apt Elev | 1321 |

RNAV (GPS) RWY 18  
FLOYD W JONES LEBANON (LBO)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                       |
| <div><div>▼</div><div>▲</div></div> Baro-VNAV and VDP NA when using OZS altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 18 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use OZS altimeter setting: increase LNAV/VNAV DA to 1717 feet and all visibilities ½ SM; increase all MDAs 100 feet and LNAV visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ½ SM. | MISSED APPROACH: Climb to 3500 direct PYLER and hold. |

|                     |                                    |                     |                          |
|---------------------|------------------------------------|---------------------|--------------------------|
| AWOS-3PT<br>118.975 | SPRINGFIELD APP CON<br>121.1 290.5 | CLNC DEL<br>123.725 | UNICOM<br>122.8 (CTAF) ① |
|---------------------|------------------------------------|---------------------|--------------------------|

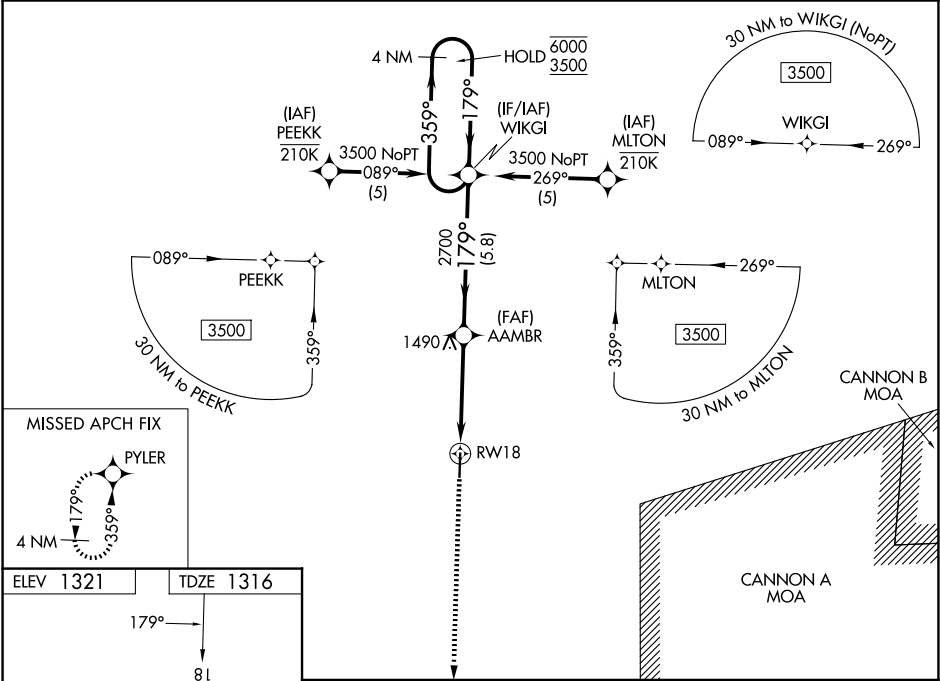

|                                                                                                                            |                       |                                                                           |                         |                       |
|----------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------------------------------------------------------------|-------------------------|-----------------------|
| <div>3500<br/>↑<br/>PYLER<br/></div>    |                       | <div>WIKGI<br/>4 NM Holding Pattern<br/>359° → 6000<br/>← 179° 3500</div> |                         |                       |
| <div>RW18<br/>1.2 NM to RW18<br/></div> |                       | <div>AAMBR<br/>2700<br/>2700<br/>179°<br/>GP 3.00°<br/>TCH 40</div>       |                         |                       |
| <div>1.2 NM</div>                                                                                                          |                       | <div>3 NM</div>                                                           |                         | <div>5.8 NM</div>     |
| CATEGORY                                                                                                                   | A                     | B                                                                         | C                       | D                     |
| LNAV/VNAV DA                                                                                                               | 1634-1 318 (400-1)    |                                                                           |                         |                       |
| LNAV MDA                                                                                                                   | 1740-1 424 (500-1)    |                                                                           | 1740-1¼ 424 (500-1¼)    |                       |
| CIRCLING                                                                                                                   | 1780-1<br>459 (500-1) | 1860-1<br>539 (600-1)                                                     | 1980-1¾<br>659 (700-1¾) | 1980-2<br>659 (700-2) |

NC-3, 09 JUL 2026 to 06 AUG 2026

NC-3, 09 JUL 2026 to 06 AUG 2026