



LOC/DME I-CIX 110.55 Chan 42 (Y)	APP CRS 176°	18L		18R	
		Rwy Ldg		13401 13400	
		TDZE		602 606	
		Apt Elev		606 606	

ILS or LOC RWY 18L

DALLAS-FORT WORTH INTL (DFW)

RADAR required for procedure entry. DME or RADAR required.			Rwy 18L MALSR	Rwy 18R ALSF-2	MISSED APPROACH: Climb to 1100, then climbing right turn to 3000 on heading 245° and FUZ VORTAC R-222 to LIKES INT/FUZ 27 DME and hold.
Simultaneous approach authorized with Rwy 17L/C/R. For inop ALS, increase S-LOC 18L Cat C/D and Sidestep 18R Cat C/D visibility to 1¼ mile. Inop table does not apply to Sidestep 18R Cats A and B.					

D-ATIS 123.775	LONE STAR APP CON 118.425	DFW TOWER		GND CON	
		126.55 127.5 (E)		121.65 121.8 (E)	
		124.15 134.9 (W)		121.85 (W)	

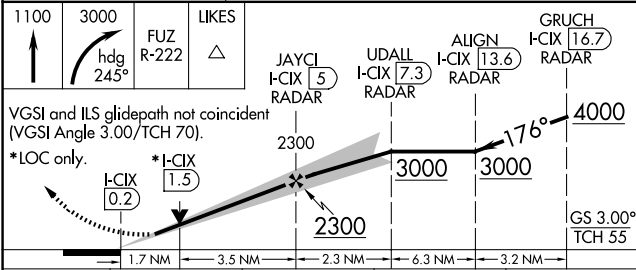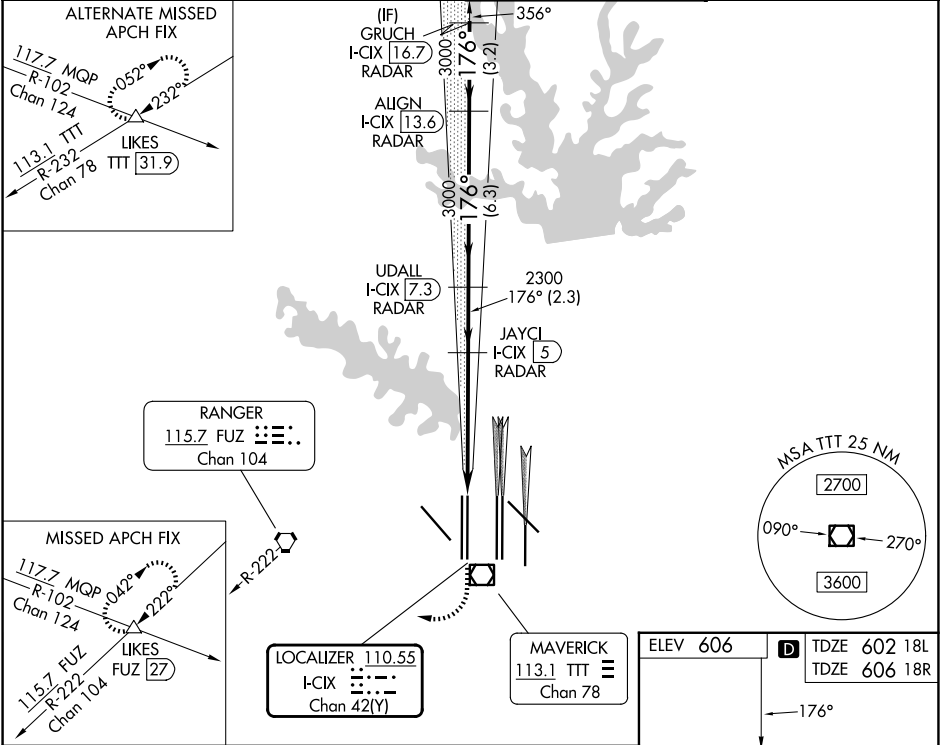

CATEGORY	A	B	C	D
S-ILS 18L	802/18 200 (200-½)			
S-LOC 18L	1220/24 618 (700-½)	1220-1¾ 618 (700-1¾)		
SIDESTEP 18R	1220/50 614 (700-1)	1220-1¾ 614 (700-1¾)	1220-1½ 614 (700-1½)	

