



WAAS CH 90342 W31B	APP CRS 311°	Rwy Ldg TDZE 523 Apt Elev 607
--	------------------------	---


RNAV (GPS) Y RWY 31R

DALLAS-FORT WORTH INTL (DFW)

RNP APCH. For inop ALS, increase LP Cat C/D visibility to RVR 5500 and LNAV Cat C/D visibility to RVR 6000.	MALSRR 	MISSED APPROACH: Climb to 1000 then climbing right turn to 3000 direct SOLDO and hold.
--	------------	--

D-ATIS 123.775	LONE STAR APP CON 135.5 125.2	DFW TOWER 126.55 127.5 (E) 124.15 134.9 (W)	GND CON 121.65 121.8 (E) 121.85 (W)
--------------------------	---	---	---

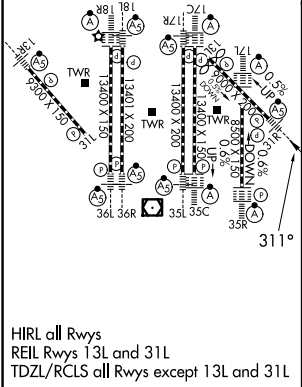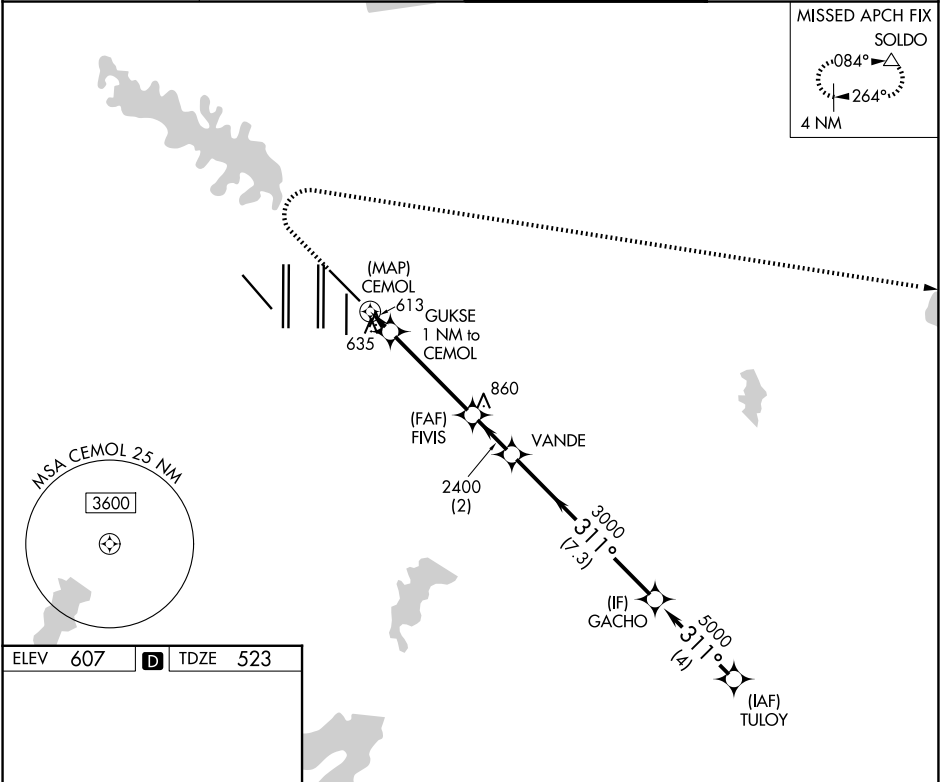

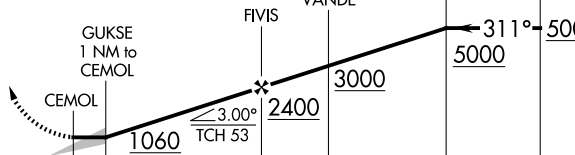1000	3000	SOLDO	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 69).			
						
						
CATEGORY	A		B		C	D
LP MDA	880/24 357 (300-½)		880/30 357 (300-⅝)			
LNAV MDA	940/24 417 (400-½)		940/40 417 (400-¾)			