

WAAS CH 40238 W27A	APP CRS 273°	Rwy Ldg TDZE Apt Elev	3641 708 708
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27


ARENS FLD (RWN)

Baro-VNAV NA. Use Knox altimeter setting; when not received, use Rochester altimeter setting and increase all DA/MDA 20 feet and LNAV/VNAV all Cts visibility 1/8 mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA.

NA

MISSED APPROACH: Climb to 2400 direct ITELE and hold.

OXI AWOS-3 135.775	SOUTH BEND APP CON ★ 132.05 257.8	UNICOM 122.8 (CTAF) 0
------------------------------	---	---------------------------------

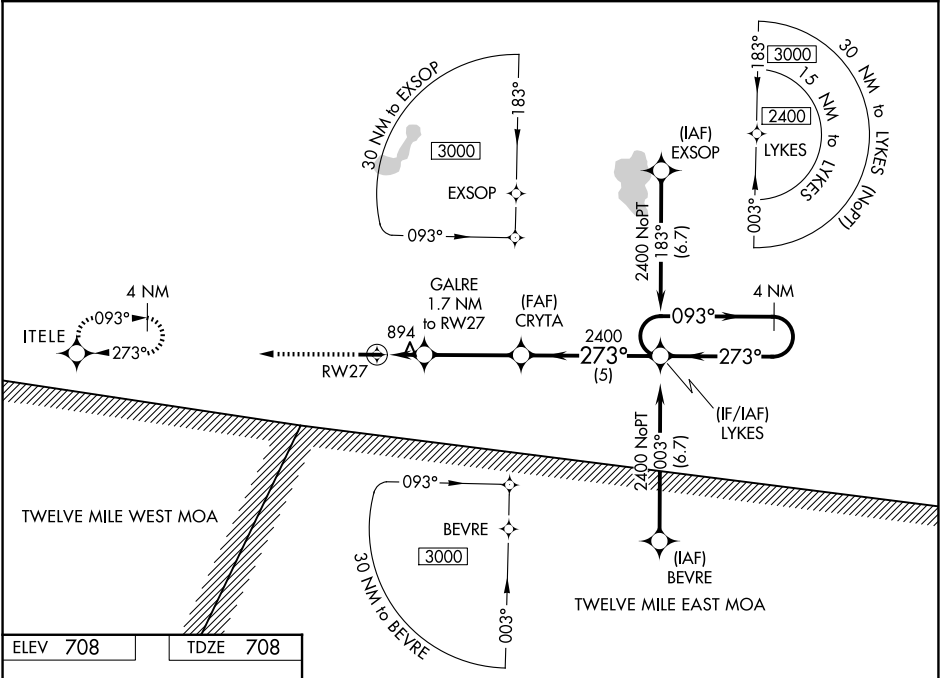

ELEV 708

TDZE 708

MIRL Rwy 9-27

REIL Rws 9 and 27

2400

↑

ITELE

✱

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.50/TCH 23).

CRYTA

2400

LYKES

4 NM Holding Pattern

*LNAV only.

GALRE 1.7 NM to RW27

RW27

*1280

2400

273°

093°

2400

GP 3.00° TCH 45

1.7 NM

3.5 NM

5 NM

CATEGORY	A	B	C	D
LPV DA	995-1 287 (300-1)			NA
LNAV/VNAV DA	1224-1¾ 516 (600-1¾)			NA
LNAV MDA	1200-1	492 (500-1)	1200-1¾ 492 (500-1½)	NA
CIRCLING	1240-1	532 (600-1)	1480-2¼ 772 (800-2¼)	NA