


VORTAC OKW 111.0 Chan 47	APP CRS 076°	Rwy Ldg TDZE 700 Apt Elev 700
--	------------------------	---

VOR RWY 5
BESSEMER NTL (EKY)

NA Inoperative table does not apply. When local altimeter setting not received, use Alabaster altimeter setting and increase all MDAs 60 feet; increase S-5 Cat C visibility 1/8 SM and Circling Cat D visibility 1/4 SM.	MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct OKW VORTAC and hold.
--	---

AWOS-3PT 118.825	BIRMINGHAM APP CON 124.9 351.85	CLNC DEL 123.75	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------	---------------------------------

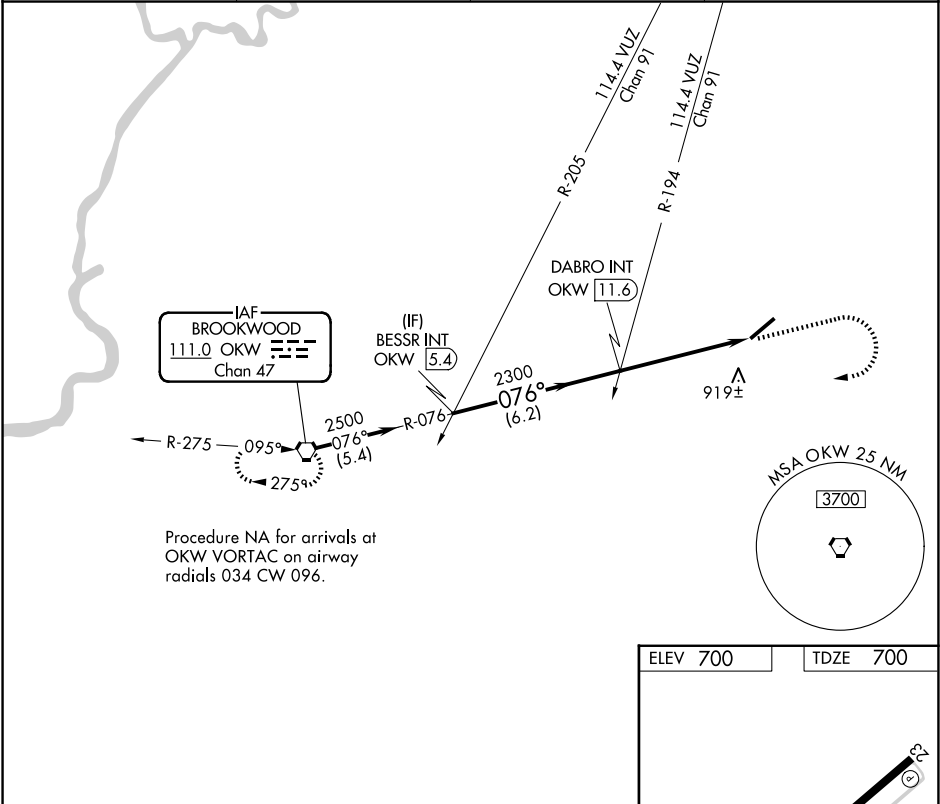

BESSR INT OKW 5.4		DABRO INT OKW 11.6		OKW 16.4	
2500		2300		1500	
076°		3.02° TCH 45		1500	
6.2 NM		4.9 NM		3000	
VGSIs and descent angles not coincident (VGSIs Angle 3.00/TCH 60).				OKW	
CATEGORY		A		B	
S-5		1180-1 480 (500-1)		1180-1 3/8 480 (500-1 3/8)	
CIRCLING		1200-1 500 (500-1)		1220-1 520 (600-1 1/2)	
				1320-2 620 (700-2)	

ELEV 700	TDZE 700
HIRL Rwy 5-23 0	
REIL Rwy 5 and 23 0	
FAF to MAP 4.9 NM	
Knots	60 90 120 150 180
Min:Seq	4:54 3:16 2:27 1:58 1:38

SE-4, 09 JUL 2026 to 06 AUG 2026

SE-4, 09 JUL 2026 to 06 AUG 2026