

WAAS CH 90216 W27A	APP CRS 274°	Rwy Ldg TDZE 552 Apt Elev 569
--	------------------------	---

RNAV (GPS) RWY 27


MERKEL FLD SYLACAUGA MUNI (SCD)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (118°F). Baro-VNAV and VDP NA when using Birmingham altimeter setting.

▲ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Birmingham altimeter setting and increase LPV DA to 889 feet, LNAV/VNAV DA to 1161 feet, and all visibilities ¾ mile. Increase all MDA 100 feet and LNAV Cat C and D visibilities ¼ mile.

MISSED APPROACH:
Climb to 3200 direct
GOKYE and hold.

AWOS-3PT 119.125	BIRMINGHAM APP CON 123.8 256.8	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

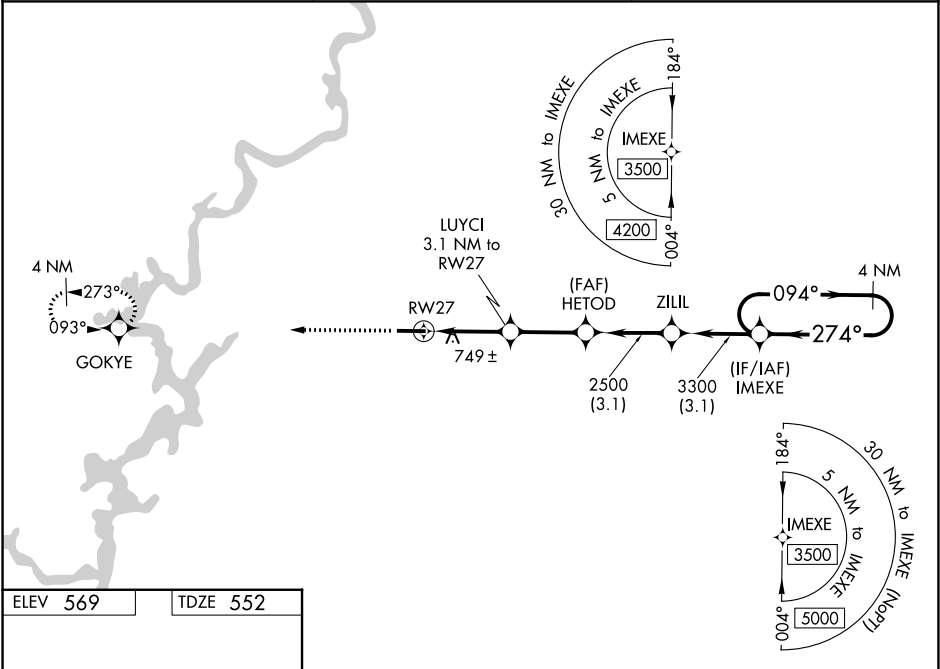

ELEV 569	TDZE 552	3200 GOKYE VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).			
☆ 274° 0.4% UP 5390 X 100 27		4 NM Holding Pattern			
		IMEXE 3500 GP 3.10° TCH 48			
		*LNAV only: LUYCI 3.1 NM to RW27 *1.3 NM to RW27			
		HETOD 2500 ZILIL 3300			
		RW27 1600*			
		1.3 NM 1.8 NM 2.7 NM 3.1 NM 3.1 NM			
		CATEGORY A B C D			
		LPV DA 802-¾ 250 (300-¾)			
		LNAV/VNAV DA 1074-1¾ 522 (600-1¾)			
		LNAV MDA 1000-1 448 (500-1) 1000-1¾ 448 (500-1¾)			
		CIRCLING 1140-1 571 (600-1) 1400-1¼ 831 (900-1¼) 1620-3 1051 (1100-3) 1700-3 1131 (1200-3)			