


WAAS CH 65922 W23A	APP CRS 228°	Rwy Ldg TDZE Apt Elev	5500 19 19
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 23
CHESAPEAKE RGNL (CPK)

RNP APCH. ▼ ▲ Rwy 23 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Norfolk Intl altimeter setting and increase all DA 36 feet and all MDA 40 feet. Baro-VNAV and YDP NA with Norfolk Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C.	MISSED APPROACH: Climb to 2000 direct NALDE and hold.
--	---

AWOS-3 123.675	NORFOLK APP CON 118.9 353.7	GCO 135.075	UNICOM 123.075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------	-----------------------------------

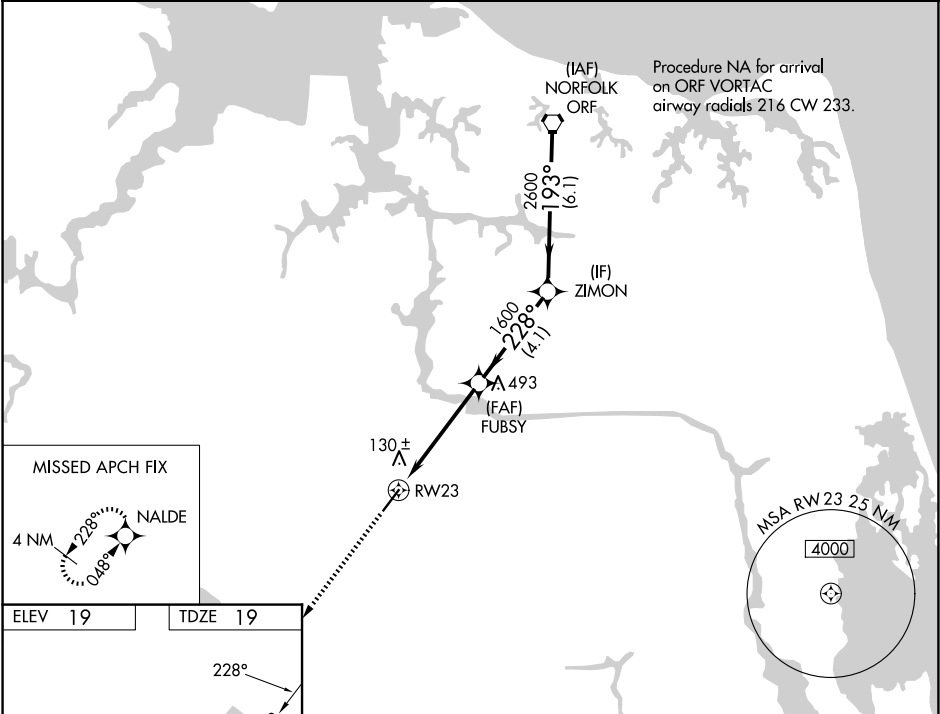

ELEV 19	TDZE 19				
		*LNAV only *1.3 NM to RWY23			
		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 42).			
		ORF VORTAC 3000 GP 3.00° TCH 56			
CATEGORY		A	B	C	D
LPV DA		311-1 292 (300-1)			
LNAV/VNAV DA		312-1 293 (300-1)			
LNAV MDA		480-1 461 (500-1)		480-1 3/8 461 (500-1 3/8)	