

WAAS CH 78222 W05A	APP CRS 048°	Rwy Ldg TDZE Apt Elev	5500 18 19
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 5
CHESAPEAKE RGNL (CPK)


RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use ORF altimeter setting and increase LPV DA to 256 feet; increase LNAV/VNAV DA to 329 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM. Baro-VNAV NA when using ORF altimeter setting. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ NM.


MALSRL

⚠ MISSED APPROACH: Climb to 500 then climbing left turn to 2300 direct NALDE and hold.

AWOS-3 123.675	NORFOLK APP CON 118.9 353.7	GCO 135.075	UNICOM 123.075 (CTAF) 0
--------------------------	---------------------------------------	-----------------------	-----------------------------------

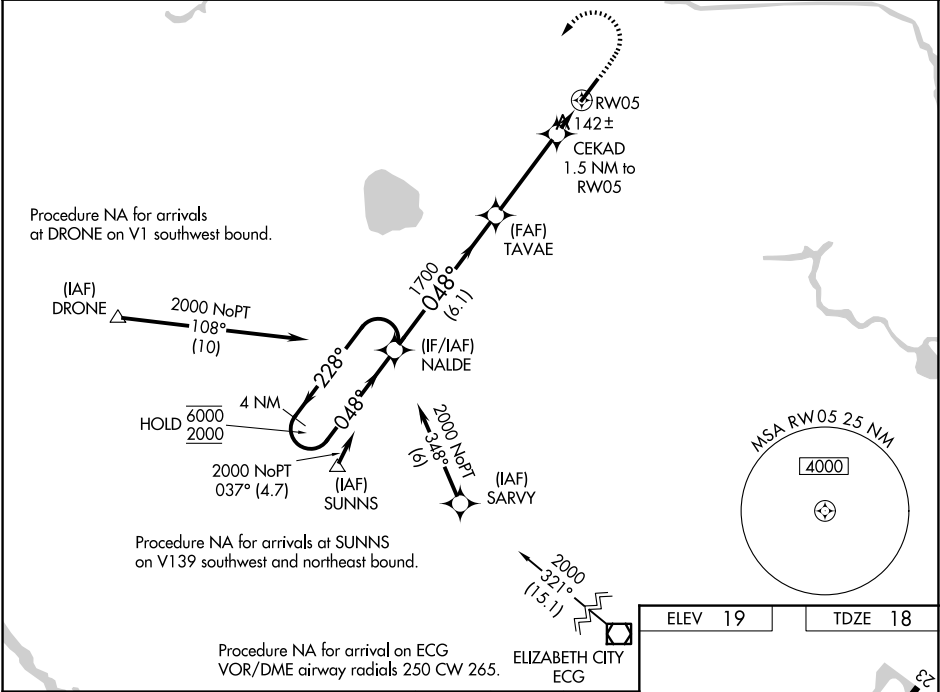

4 NM Holding Pattern		NALDE		500	2300	NALDE
6000 ← 228°		048° →				
2000		048°				
GP 3.00°		TAVAE				
TCH 43		1700				
		CEKAD 1.5 NM to RW05				
		520				
		6.1 NM				
		3.7 NM				
		1.5 NM				
CATEGORY	A	B	C	D		
LPV DA		218-½	200 (200-½)			
LNAV/VNAV DA		291-½	273 (300-½)			
LNAV MDA	400-½	382 (400-½)	400-⅝	382 (400-⅝)		
CIRCLING	460-1 441 (500-1)	480-1 461 (500-1)	520-1½ 501 (600-½)	580-2 561 (600-2)		

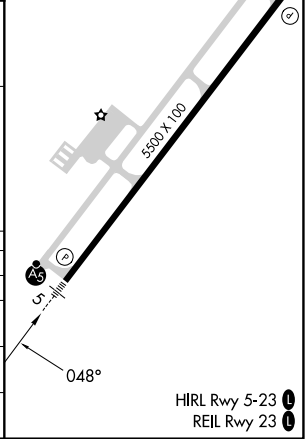

NE-3, 09 JUL 2026 to 06 AUG 2026

NE-3, 09 JUL 2026 to 06 AUG 2026