

WAAS CH 99334 W04A	APP CRS 038°	Rwy Ldg TDZE Apt Elev	4204 1376 1379
--	------------------------	-----------------------------	---







RNAV (GPS) RWY 4

EL DORADO/CAPT JACK THOMAS MEML (EQA)

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above
Δ NA 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use
Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet.
Baro-VNAV NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH: Climb to 3100 direct SMALE and hold.

AWOS-3P 120.875	WICHITA APP CON 134.8 269.1	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

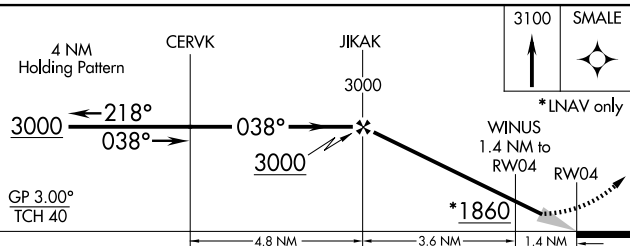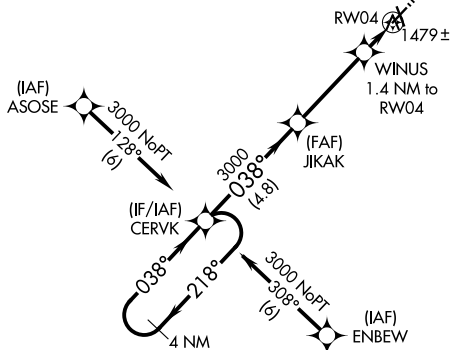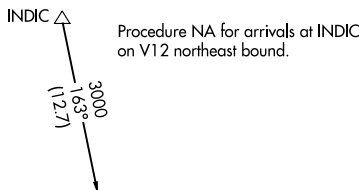

CATEGORY		A		B		C		D	
LPV	DA	1576-1		200 (200-1)		NA			
LNAV/ VNAV	DA	1626-1		250 (300-1)		NA			
LNAV	MDA	1740-1		364 (400-1)		NA			
CIRCLING		1820-1 441 (500-1)		1960-1 581 (600-1)		NA			

