

WAAS CH 82324 W34A	APP CRS 346°	Rwy Ldg 11000 TDZE 681 Apt Elev 723
--	------------------------	--

RNAV (GPS) RWY 34R

PEROT FLD/FORT WORTH ALLIANCE (AFW)

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Circling NA east of Rwy 16L-34R. DME/DME RNP-0.3 NA.


▲

For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV all Cats visibility to 2 SM, increase LNAV Cat E visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct WIGZU and on track 283° to OBLON and hold.

ATIS 126.925	LONE STAR APP CON 118.1 306.95	ALLIANCE TOWER 135.15 257.9	GND CON 132.65 306.2
------------------------	--	---------------------------------------	--------------------------------

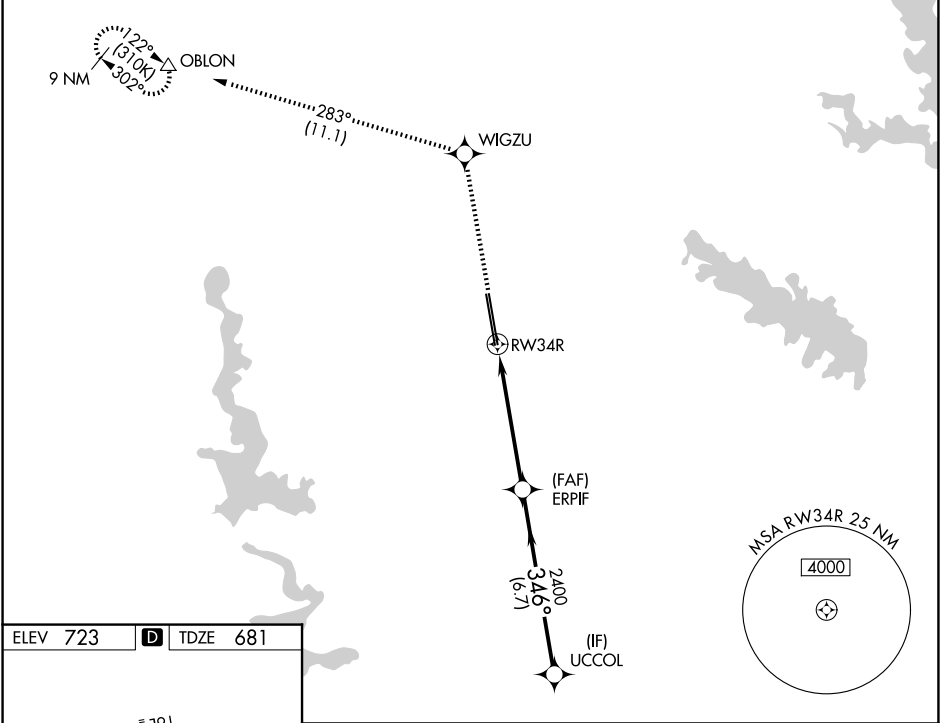

ELEV 723 D TDZE 681

TDZ/CL Rwy 16L and 34R
HIRL Rwy 16L-34R
and 16R-34L
REIL Rwy 16R and 34L

3000	WIGZU	tr 283°	OBLON	ERPIF	UCCOL	3000
*LNAV only.		*1.6 NM to RWY34R				GP 3.00° TCH 58
RWY34R		1.6 NM	3.7 NM	6.7 NM		
CATEGORY	A	B	C	D	E	
LPV DA	881/18		200 (200-½)			
LNAV/VNAV DA	1437-1¾		756 (800-1¾)			
LNAV MDA	1240/24	559 (600-½)	1240/60	559 (600-1¼)		
CIRCLING	1240-1 517 (600-1)	1320-1 597 (600-1)	1360-1¾ 637 (700-1¾)	1380-2 657 (700-2)	1380-2¼ 657 (700-2¼)	