


WAAS CH 61338 W12A	APP CRS 125°	Rwy Ldg TDZE Apt Elev	4200 2756 2756
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

BEACH (20U)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.		MISSED APPROACH: Climb to 5000 direct EKOYU and hold.
AWOS-3 118.175	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0

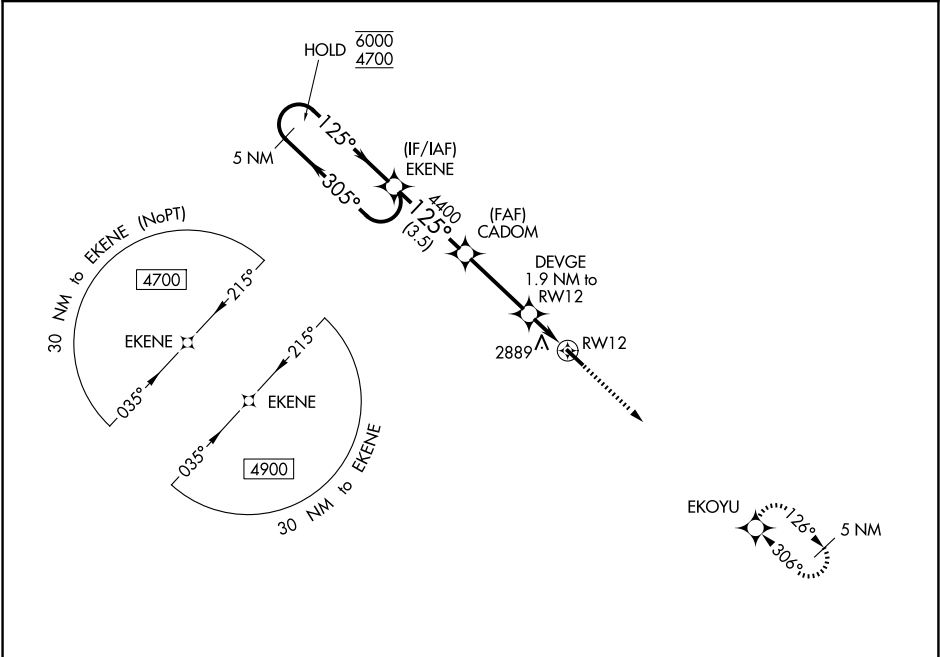

5 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 26).		ELEV 2756	TDZE 2756
EKOYU		5000		EKOYU	
6000 ← 305° 4700 → 125°		CADOM 4400		DEVGE 1.9 NM to RW12	
GP 3.00° TCH 40		* 3400		* LNAV only	
3.5 NM		3.1 NM		0.8 NM	
CATEGORY		A		B	
LPV DA		3006-1		250 (300-1)	
LNAV/VNAV DA		3051-1		295 (300-1)	
LNAV MDA		3140-1		384 (400-1)	
CIRCLING		3280-1 524 (600-1)		3360-1 604 (700-1)	