


WAAS CH 93844 W27A	APP CRS 267°	Rwy Idg TDZE 752 Apt Elev 752
--	------------------------	---

RNAV (GPS) RWY 27

BUFFALO-LANCASTER RGNL (BQR)

RNP APCH - GPS.	▼ ▲ NA Rwy 27 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA. Use Buffalo Niagara Intl altimeter setting. Straight-in Rwy 27 at night, Circling Rwy 27 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.	MISSED APPROACH: Climb to 1300 then climbing left turn to 3400 direct DMRIO and hold, continue climb-in-hold to 3400.
-----------------	--	--

BUF ASOS 135.35	BUFFALO APP CON 126.15 263.125	UNICOM 123.05 (CTAF) 0
---------------------------	--	---

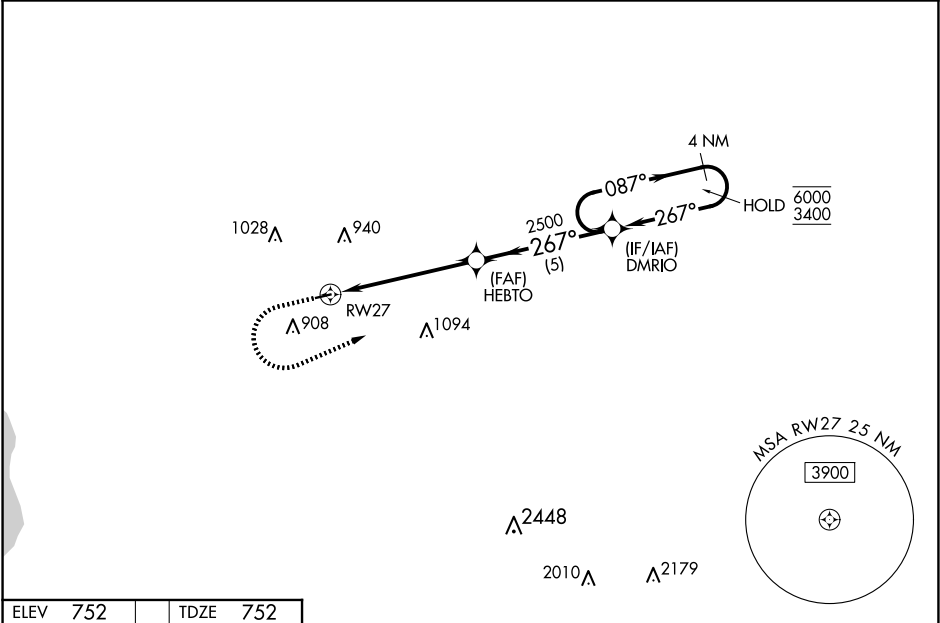

ELEV 752	TDZE 752
-----------------	-----------------

	1300		3400	DMRIO	4 NM Holding Pattern	
	HEBTO		2500	DMRIO	GP 3.00° TCH 40	
	RW27		2500	DMRIO	5.4 NM	
	5.4 NM		5 NM	DMRIO		
CATEGORY	A	B	C	D		
LPV DA	1070-1	318 (400-1)	NA			
LNAV/VNAV DA	1164-1½	412 (500-1½)	NA			
LNAV MDA	1320-1	568 (600-1)	NA			
CIRCLING	1320-1	568 (600-1)	NA			

MIRL Rwy 9-27 **0**
REIL Rwys 9 and 27 **0**

NE-2, 09 JUL 2026 to 06 AUG 2026

NE-2, 09 JUL 2026 to 06 AUG 2026