

WAAS CH 50317 W17A	APP CRS 175°	Rwy Ldg TDZE 1791 Apt Elev 1791
--	------------------------	---


RNAV (GPS) RWY 17L
ABILENE RGNL (ABI)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 45°C.

MISSED APPROACH: Climb to 4000 direct IBRIF and hold, continue climb-in-hold to 4000.

ATIS 118.25	ABILENE APP CON 125.0 338.3 (E) 127.2 282.3 (W)	ABILENE TOWER 120.1 257.8	GND CON 121.7 348.6
-----------------------	---	-------------------------------------	-------------------------------

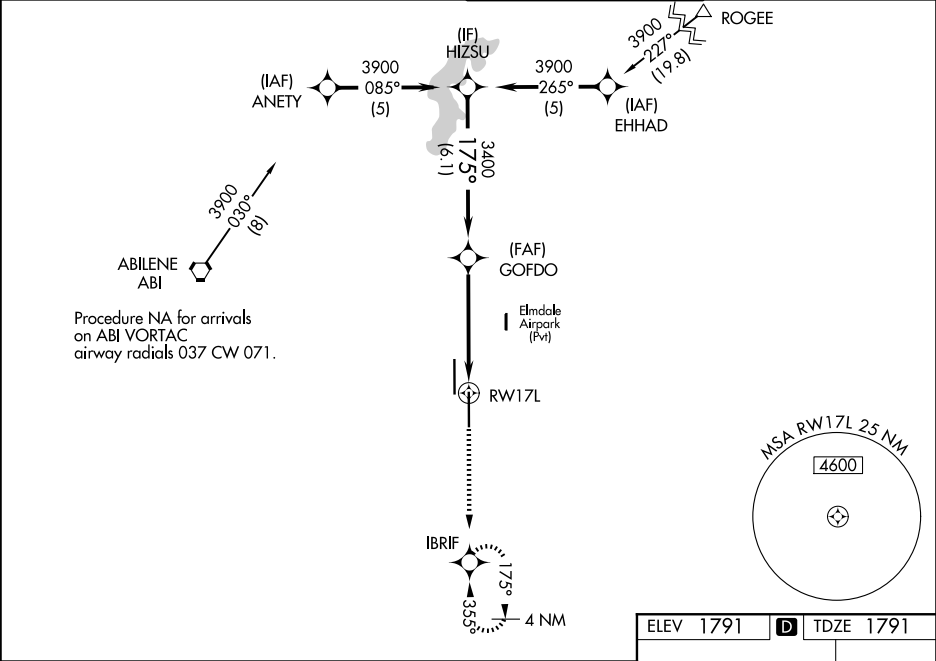

HIZSU

3900

175°

GOFDO

3400

175°

IBRIF

4000

175°

*LNAV only.

GP 3.00°

TCH 54

6.1 NM

3.6 NM

1.2 NM

RW17L

CATEGORY	A	B	C	D	E
LPV DA	2041-3/4 250 (300-3/4)				
LNAV/VNAV DA	2171-1 1/4 380 (400-1 1/4)				
LNAV MDA	2240-1	449 (500-1)	2240-1 3/8	449 (500-1 3/8)	
CIRCLING	2300-1 509 (600-1)	2320-1 529 (600-1)	2420-1 3/4 629 (700-1 3/4)	2460-2 669 (700-2)	2620-3 829 (900-3)

ELEV 1791

TDZE 1791

17L

175°

35L

7198 X 150

35R

REIL Rwy 35L

HIRL Rwy 17L-35R and 17R-35L