


APP CRS	Rwy Ldg	9754
034°	TDZE	5312
	Apt Elev	5355

RNAV (RNP) Z RWY 3
ALBUQUERQUE INTL SUNPORT (ABQ)

ASR	For uncompensated Baro-VNAV systems, procedure NA below -12°C (11°F) or above 45°C (114°F). For inop MALSR, increase RNP 0.30 all Cats visibility to RVR 4000. GPS required.	MALSR	MISSED APPROACH: Climb to 6200 then climbing left turn to 8000 direct ABQ VORTAC and hold.
-----	--	-------	--

D-ATIS	ALBUQUERQUE APP CON	ALBUQUERQUE TOWER	GND CON	CLNC DEL	CPDLC
118.0 257.7	123.9 354.1	120.3 351.9	121.9 348.6	119.2 259.3	

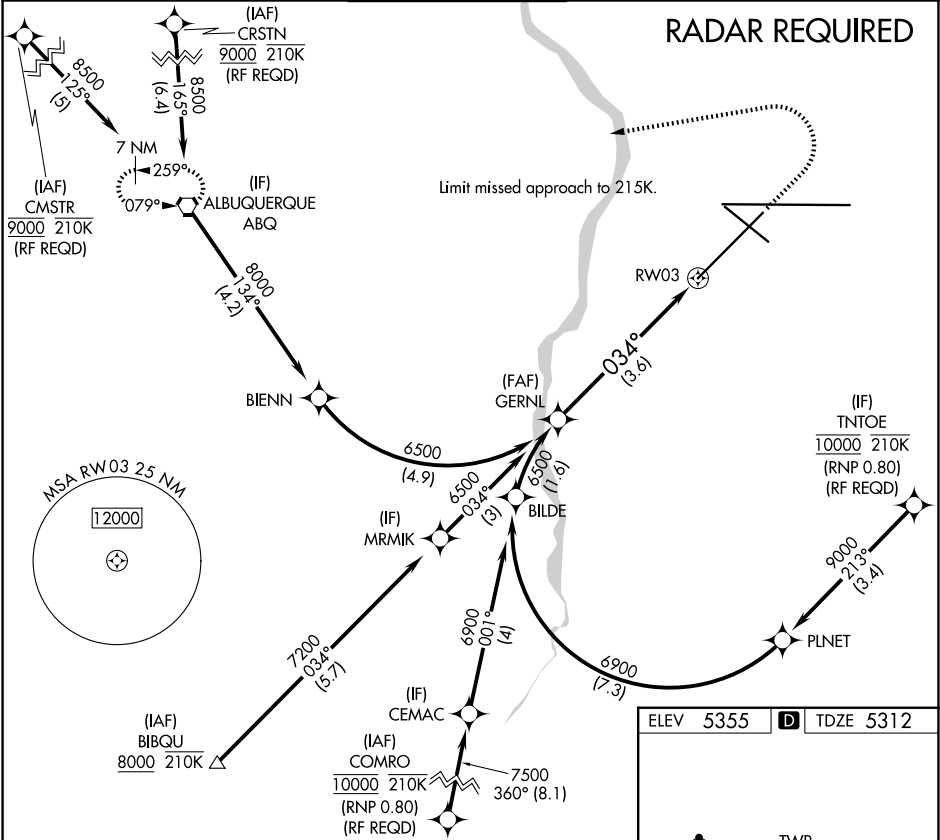

GERNL	See planview for multiple IF locations.	6200	8000	ABQ
6500				
GP 3.00°				
TCH 60				
	3.6 NM			
CATEGORY	A	B	C	D
RNP 0.30 DA	5571/24	259 (300-½)		
AUTHORIZATION REQUIRED				

