
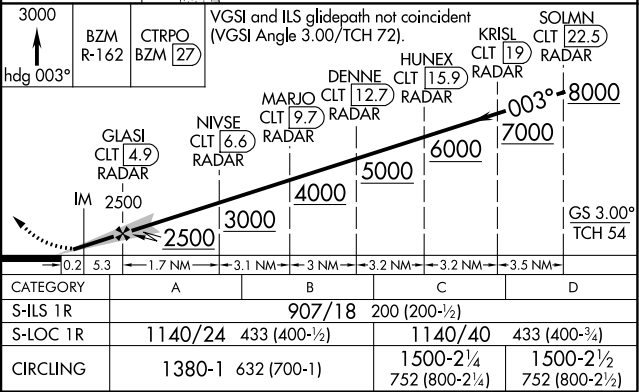
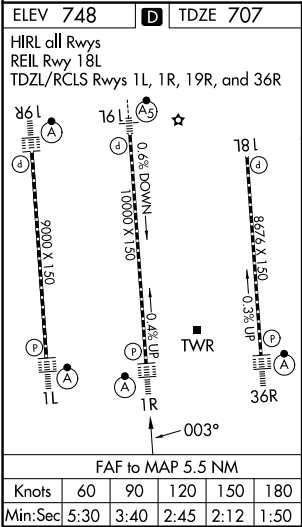


LOC I-DQG	APP CRS	Rwy Ldg
111.7	003°	10000
		TDZE
		707
		Apt Elev
		748

ILS or LOC RWY 1R
CHARLOTTE/DOUGLAS INTL (CLT)

RADAR required for procedure entry. DME or RADAR required.			ALSIF-2	MISSED APPROACH: Climb to 3000 on heading 003° and on BZM VOR/DME R-162 to CTRPO/BZM 27 DME/RADAR and hold.
Circling NA at night. Simultaneous approach authorized. Localizer not suitable for electronic rollout guidance.				
D-ATIS	CHARLOTTE APP CON		CHARLOTTE TOWER	
121.15	128.325 (001°-119°)	257.2 (180°-359°)	118.1 257.8 (18L-36R)	GND CON
	120.05 (120°-295°)	307.8 (360°-179°)	126.4 257.8 (1R-19L)	121.8 348.6 (W)
	134.75 (296°-360°)		133.35 257.8 (1L-19R)	121.9 348.6 (E)

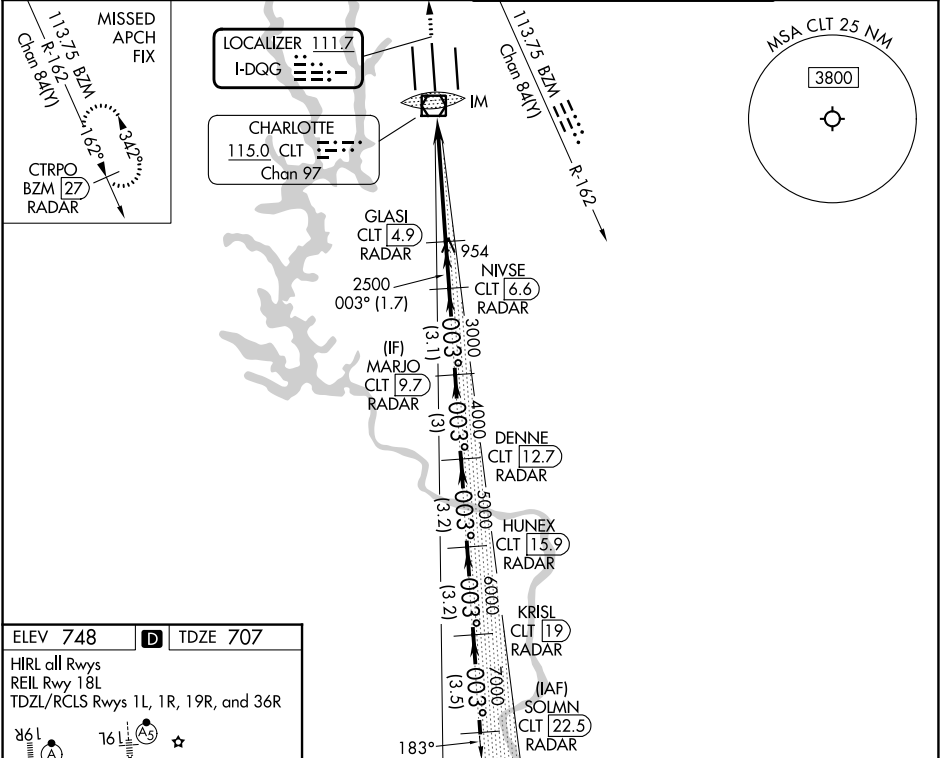

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026