

RNAV (RNP) Z RWY 19L
CHARLOTTE/DOUGLAS INTL (CLT)

MALSR

MISSED APPROACH: Climb to 3000 direct DENNE and hold.





T For uncompensated Baro-VNAV systems, procedure NA below -7°C or above 54°C. Simultaneous approach authorized.

D-ATIS	CHARLOTTE APP CON	
121.15	128.325 (001°-119°)	257.2 (180°-359°)
	120.05 (120°-295°)	307.8 (360°-179°)
	134.75 (296°-360°)	

CHARLOTTE TOWER

118.1	257.8	(18L-36R)
126.4	257.8	(1R-19L)
133.35	257.8	(1L-19R)

GND CON	
121.8	348.6 (W)
121.9	348.6 (E)

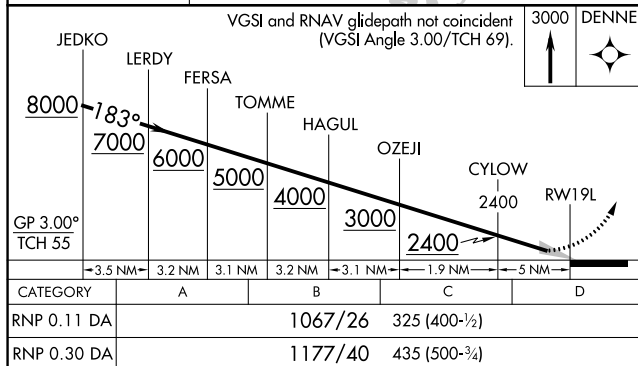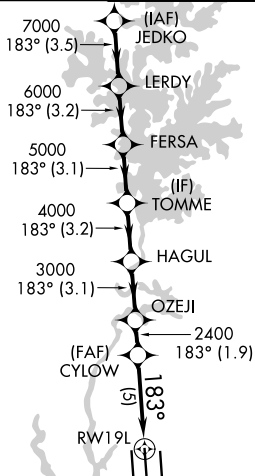

AUTHORIZATION REQUIRED

