


WAAS CH 82415 W19D	APP CRS 183°	Rwy Ldg TDZE 744 Apt Elev 748
--	------------------------	---


RNAV (GPS) Y RWY 19R
CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH - GPS.	ALSF-2	MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct STULL and hold, continue climb-in-hold to 4000.
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, increase LNAV Cat C/D visibility to RVR 5500.		

D-ATIS	CHARLOTTE APP CON	CHARLOTTE TOWER	GND CON
121.15	128.325 (001°-119°) 120.05 (120°-295°) 134.75 (296°-360°)	118.1 (18L-36R) 126.4 (1R-19L) 133.35 (1L-19R)	121.8 (W) 348.6 (E)

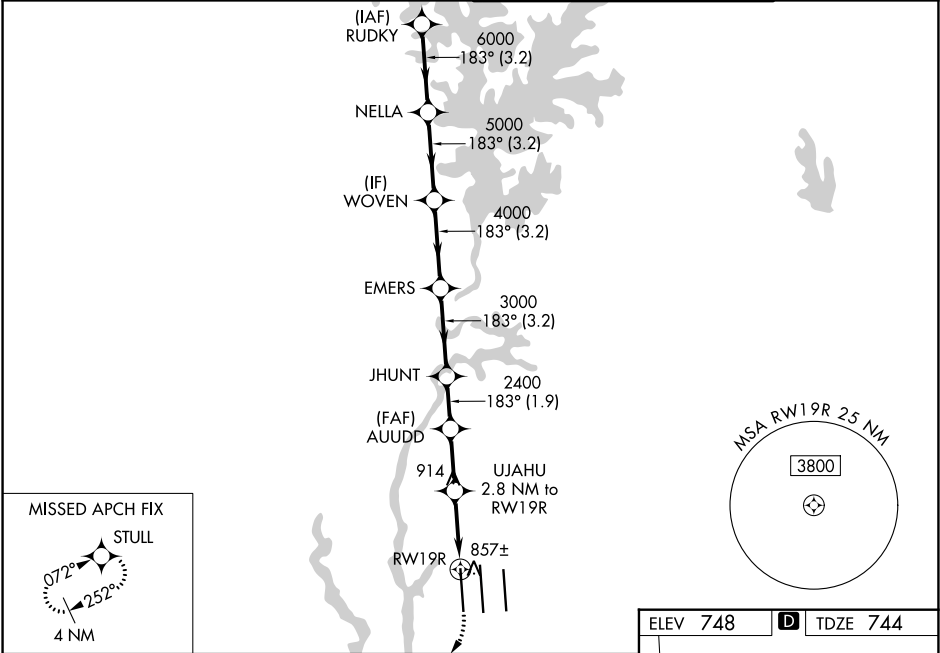

RUDKY		NELLA		VOVEN		EMERS		JHUNT		AUUDD		UJAHU		RW19R		STULL	
7000		6000		5000		4000		3000		2400		2400		1680			
GP 3.00°		TCH 55															
-3.2 NM		-3.2 NM		-3.2 NM		-3.2 NM		-1.9 NM		2.2 NM		1.8 NM		1 NM			
CATEGORY		A		B		C		D									
LPV DA				944/18		200 (200-½)											
LNAV/VNAV DA				1018/24		274 (300-½)											
LNAV MDA		1120/24		376 (400-½)		1120/35		376 (400-¾)									
CIRCLING		1380-1		632 (700-1)		1500-2¼		752 (800-2¼)		1500-2½		752 (800-2½)					

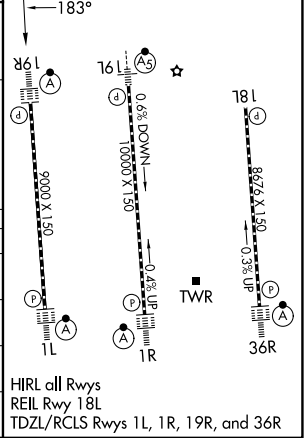

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026