

WAAS
CH **65614**
W04A

APP CRS
047°

Rwy Ldg
TDZE **619**
Apt Elev **620**

RNAV (GPS) Z RWY 4R

CHICAGO MIDWAY INTL (MDW)

RNP APCH - GPS


▼

▲

Rwy 4R helicopter visibility reduction below RVR 4000 NA.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS 132.75	CHICAGO APP CON 128.2 353.875	MIDWAY TOWER 135.2 269.125	GND CON 118.075
-------------------------	---	--------------------------------------	---------------------------

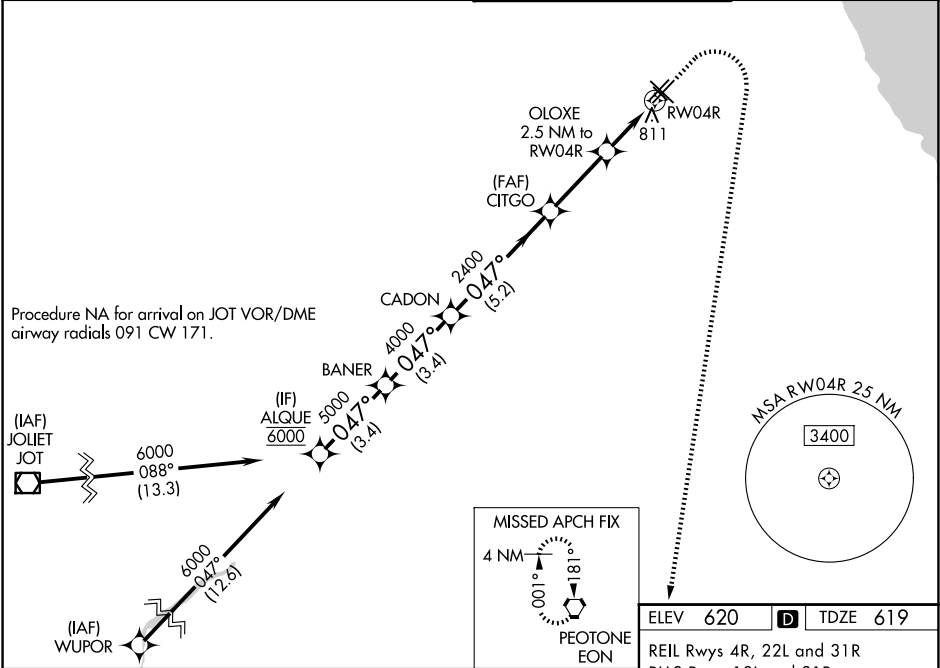

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 66).

ALQUE 6000
BANER 5000
CADON 4000
CITGO 2400
OLOXE 2.5 NM to RWY 4R
RWY 4R
1100
2600
EON

GP 3.00°
TCH 50
3.4 NM
3.4 NM
5.2 NM
2.9 NM
1.3 NM
1.2 NM

CATEGORY	A	B	C	D
LPV DA	869/40		250 (300-¾)	
LNAV/VNAV DA	1097-1⅓		478 (500-1⅓)	
LNAV MDA	1080/55	461 (500-1)	1080-1⅓	461 (500-1⅓)
CIRCLING	1120-1	500 (500-1)	1340-2 720 (800-2)	1340-2¼ 720 (800-2¼)

REIL Rws 4R, 22L and 31R
RLS Rws 13L and 31R
HIRL Rws 4R-22L and 13L-31R
MIRL Rws 4L-22R and 13R-31L

EC-3, 06 AUG 2026 to 03 SEP 2026

EC-3, 06 AUG 2026 to 03 SEP 2026