


CO NDB 407	APP CRS 352°	Rwy Ldg 11022 TDZE 6075 Apt Elev 6187	NDB RWY 35L CITY OF COLORADO SPRINGS MUNI (COS)
---------------	-----------------	--	--

▼ ▲ RADAR monitoring required when R-2601 in use. For inop ALS, increase S-35L Cat A/B visibility RVR 5500, and Cat C/D to 1½ SM.	MALSR	MISSED APPROACH: Climb to 6700 then climbing right turn to 9000 on heading 051° and on BRK VOR/DME R-091 to ADANE INT/BRK 11.1 DME and hold.
--	------------------------------	--

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
---------------------	----------------------------------	------------------------------	------------------------	----------------------------

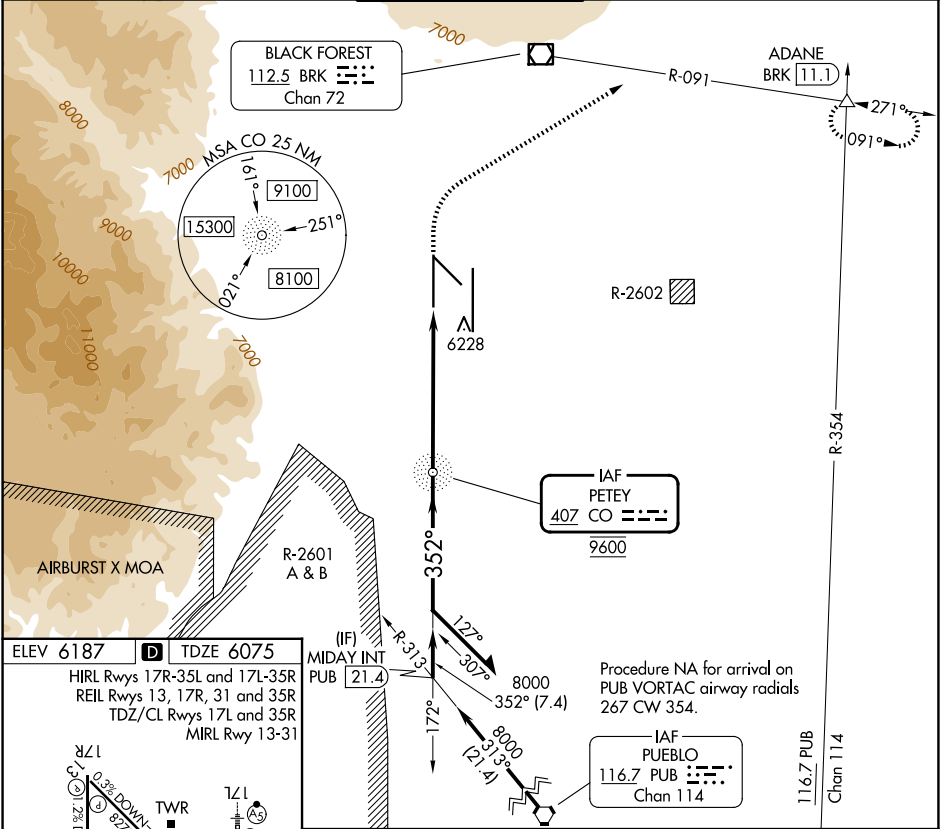

ELEV 6187	D	TDZE 6075	HIRL Rwy 17R-35L and 17L-35R REIL Rwy 13, 17R, 31 and 35R TDZ/CL Rwy 17L and 35R MIRL Rwy 13-31			
			Procedure NA for arrival on PUB VORTAC airway radials 267 CW 354.			
FAF to MAP 6 NM			Remain within 10 NM			
Knots	60	90	120	150	180	
Min:Sec	6:00	4:00	3:00	2:24	2:00	
CATEGORY	A	B	C	D		
S-35L	6540/40	465 (400-¾)	6540/50	465 (400-1)		
CIRCLING	6740-1 553 (600-1)	6760-1 573 (600-1)	6980-2¼ 793 (800-2¼)	7240-3 1053 (1100-3)		