


WAAS CH 45526 W05A	APP CRS 052°	Rwy Ldg TDZE Apt Elev	7001 228 236
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 5
COLUMBIA METRO (CAE)

RNP APCH - GPS		MALSR 	MISSED APPROACH: Climb to 2400 direct POMIE and on track 018° to BEFTY and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C and D visibility to 1½ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.			

ATIS 120.15	COLUMBIA APP CON 124.15 338.2 (110°-289°) 133.4 285.6 (290°-109°)	COLUMBIA TOWER 119.5 257.8	GND CON 121.9 348.6
-----------------------	---	--------------------------------------	-------------------------------

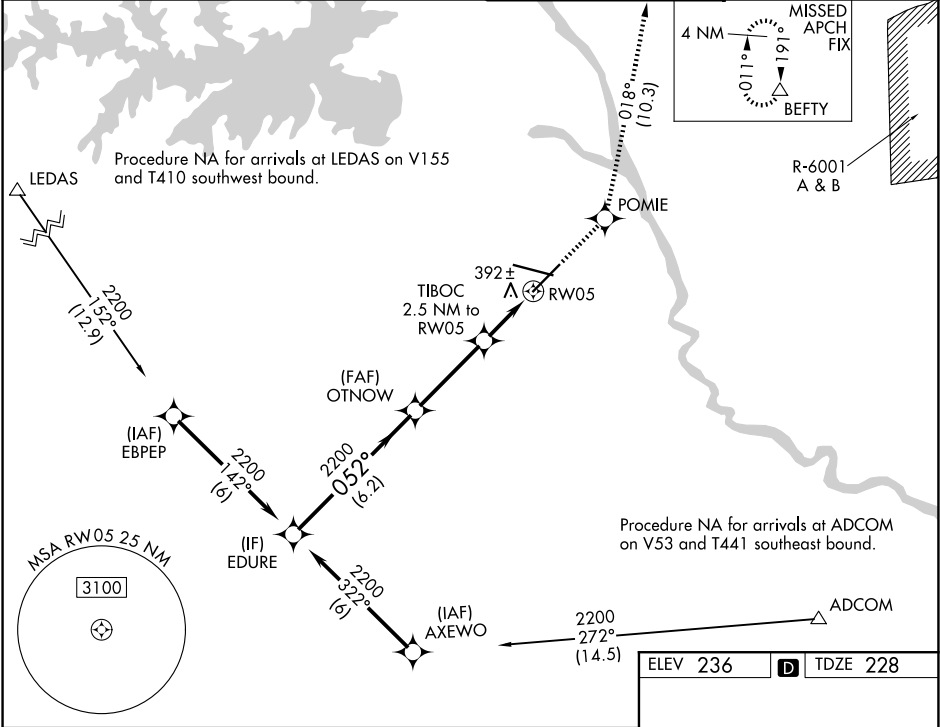

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).		2400	POMIE	BEFTY
EDURE		OTNOW	TIBOC	tr 018°
2200		2200	2.5 NM to RW05	
GP 3.00° TCH 60		1080	1.3 NM to RW05	
6.2 NM		3.5 NM	1.2 NM	1.3 NM
CATEGORY	A	B	C	D
LPV DA*	428/24 200 (200-½)			
LNAV/VNAV DA	638/40 410 (500-¾)			
LNAV MDA	700/24	472 (500-½)	700/50	472 (500-1)
CIRCLING	740-1 504 (600-1)	860-1 624 (700-1)	1040-2¼ 804 (900-2¼)	1040-2½ 804 (900-2½)

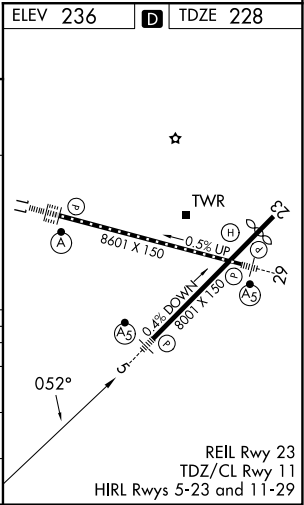

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026