

APP CRS	Rwy Ldg	8000
101°	TDZE	815
	Apt Elev	815

RNAV (RNP) Z RWY 10L

JOHN GLENN COLUMBUS INTL (CMH)


RNP APCH AR - GPS. Authorization required. From HINDO or ELTEE: RF.

Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -1.4°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 6000.



MALSR

MISSED APPROACH:
Climb to 1400 then climbing left turn to 3000 direct APE
VORTAC and hold.

D-ATIS 124.6	COLUMBUS APP CON 125.95 371.975	COLUMBUS TOWER 132.7 257.8	GND CON 121.9 348.6
-----------------	------------------------------------	-------------------------------	------------------------

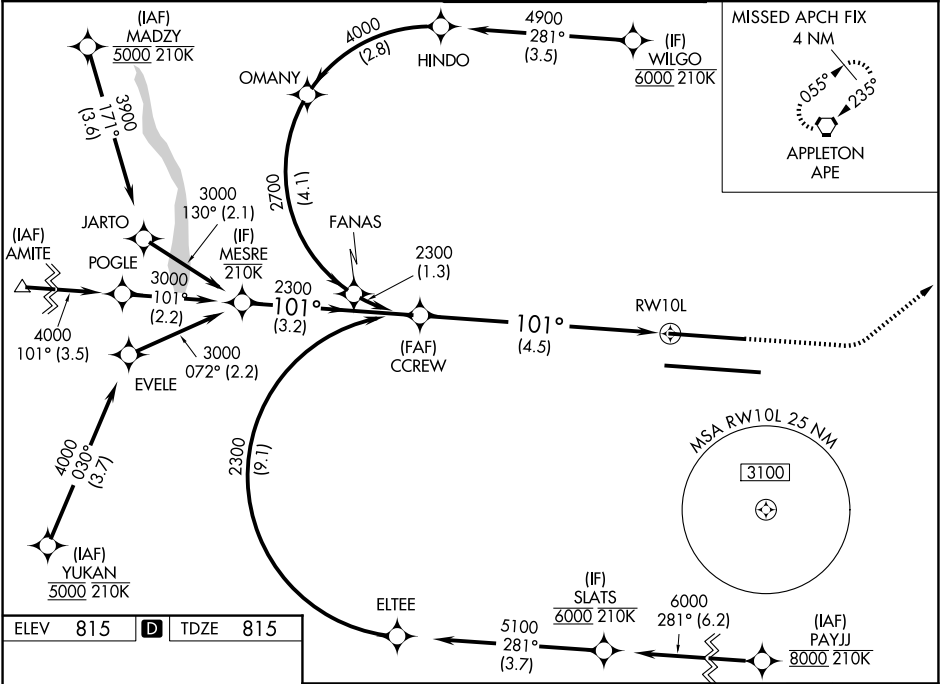

ELEV 815	D	TDZE 815
----------	----------	----------

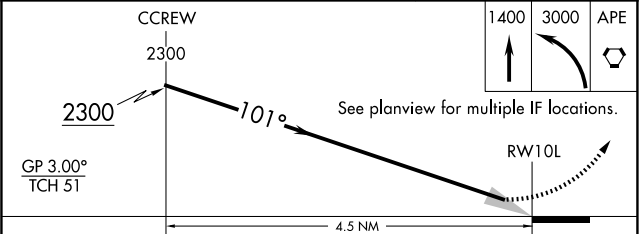

CATEGORY	A	B	C	D
RNP 0.13 DA		1148/26	333 (400-½)	
RNP 0.26 DA		1198/35	383 (400-¾)	
RNP 0.30 DA		1216/40	401 (500-¾)	

TDZL/RCLS Rwy 10R and 28L
HIRL Rwy 10R-28L and 10L-28R