

APP CRS
133°

Rwly Ldg
TDZE
Apt Elev

8310
478
487

RNAV (RNP) X RWY 13R


DALLAS LOVE FLD (DAL)

▼

For uncomputerized Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). Simultaneous approach authorized. GPS required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MISSED APPROACH: Climb to 3000 direct ENAVE and on track 151° to TACKE and hold.

D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6
------------------	--	---------------------------	-------------------------

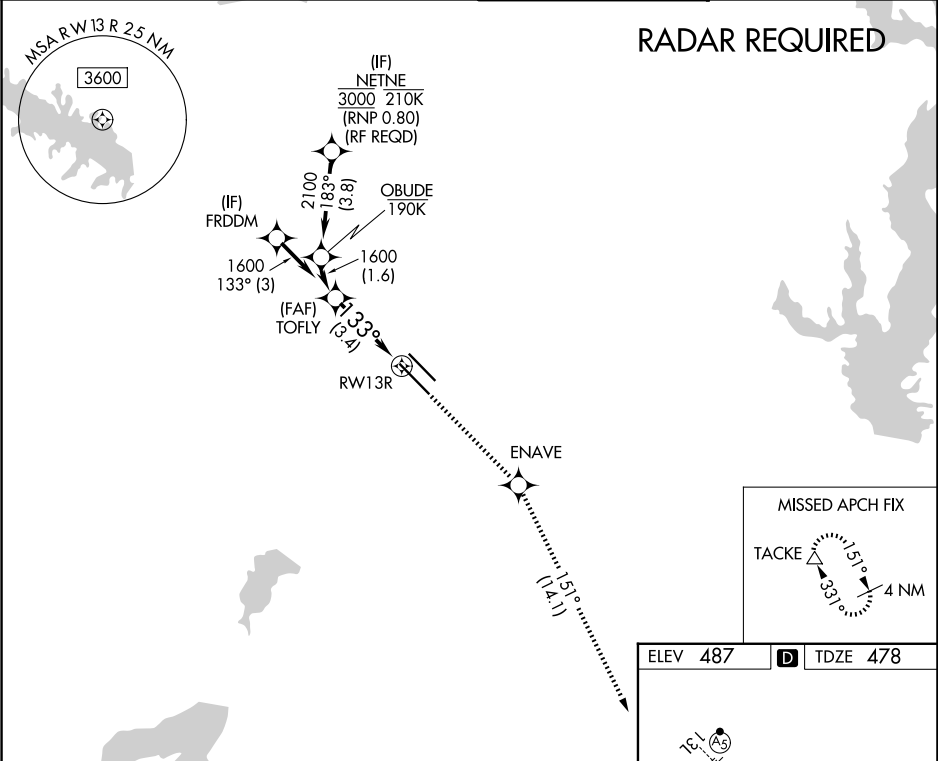

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).

3000

ENAVE

tr 151°

TACKE

See planview for multiple IF locations.

TOFLY
1600

GP 3.00°
TCH 48

1600

133°

RW13R

3.4 NM

CATEGORY	A	B	C	D
RNP 0.20 DA		781/50	303 (300-1)	
RNP 0.25 DA		833/60	355 (400-1¼)	
RNP 0.30 DA		929-1½	451 (500-1½)	

AUTHORIZATION REQUIRED

TDZL/RCLS Rwys 13L and 31L
HIRL Rwys 13L-31R, and 13R-31L