
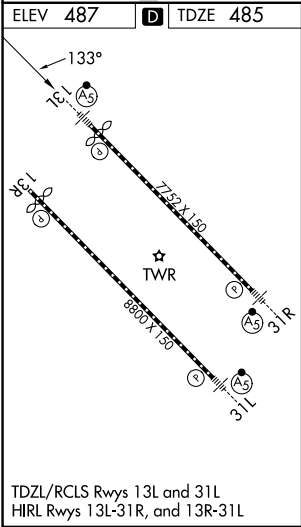


WAAS CH 50547 W13A	APP CRS 133°	Rwy Ldg 7352 TDZE 485 Apt Elev 487
--	------------------------	---

RNAV (GPS) Y RWY 13L

DALLAS LOVE FLD (DAL)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 3000 direct FAVKU and on track 116° to DUMPY and hold.
RADAR required for procedure entry.			
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C and D visibility to 1¾ SM.			
D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6

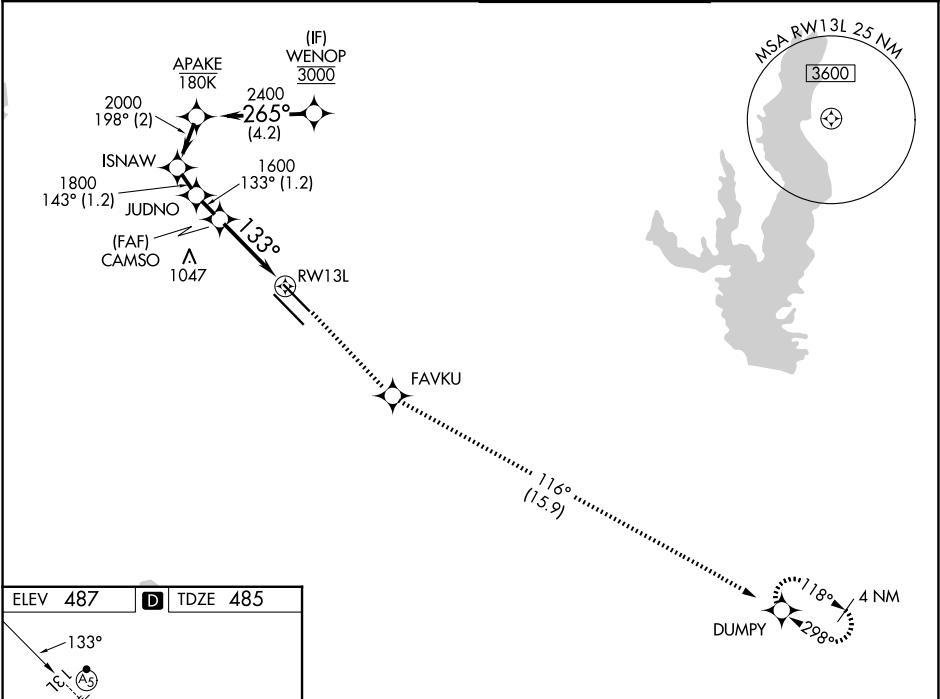

WENOP		APAKE	ISNAW	JUDNO	CAMSO	1.8 NM to RWY13L	DUMPY
3000		2400	2000	1800	1600		
GP 3.00°							
TCH 55							
4.2 NM		2 NM	1.2 NM	1.2 NM	1.6 NM	1.8 NM	
CATEGORY	A	B	C	D			
LPV DA		685/18	200 (200-1⁄2)				
LNAV/VNAV DA		760/24	275 (300-1⁄2)				
LNAV MDA	1100/24	615 (700-1⁄2)	1100-1 3⁄8	615 (700-1 3⁄8)			
CIRCLING	1100-1 613 (700-1)	1140-1 653 (700-1)	1280-2 1⁄4 793 (800-2 1⁄4)	1520-3 1033 (1100-3)			