
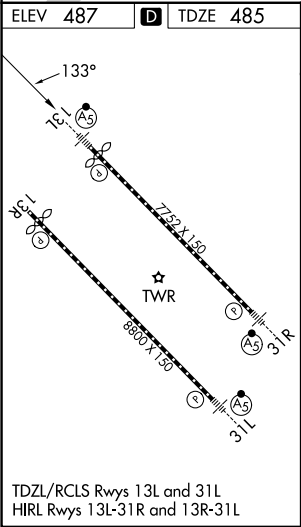




WAAS CH 99723 W13B	APP CRS 133°	Rwy Ldg TDZE Apt Elev	7352 485 487
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 13L

DALLAS LOVE FLD (DAL)

RNP APCH - GPS.			MALSR	MISSED APPROACH: Climb to 1000 then climbing left turn to 3000 direct SOLD and hold.
LNAV procedure NA during simultaneous operations. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, Baro-VNAV NA below -1.5°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D visibility to RVR 5500.				
D-ATIS 120.15	LONE STAR APP CON 124.3 282.275 (N) 125.2 343.65 (S)	LOVE TOWER 123.7 239.3	GND CON 121.75 348.6	

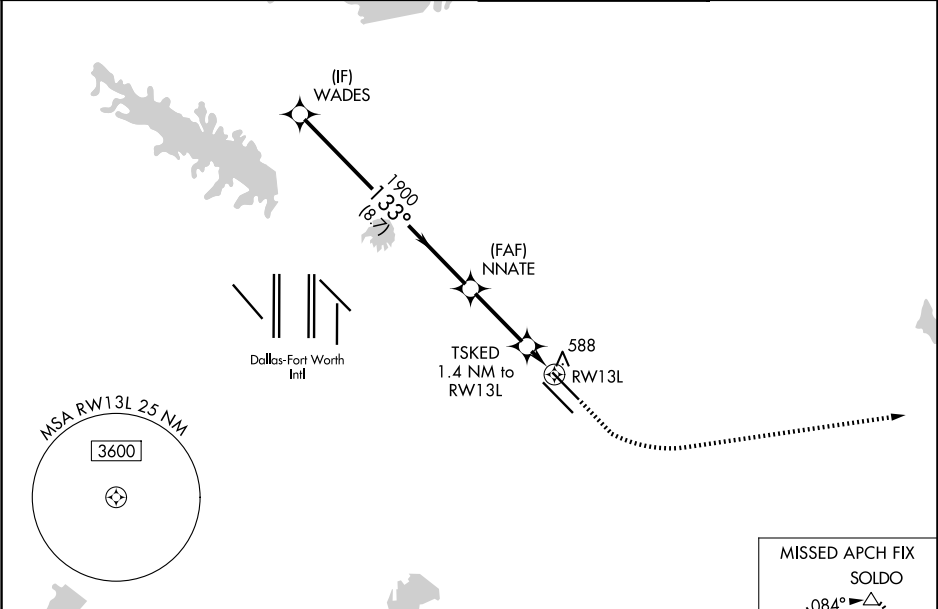

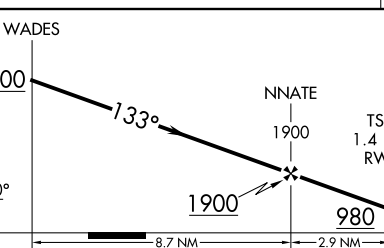				
GP 3.00° TCH 55				
CATEGORY	A	B	C	D
LPV DA	685/18		200 (200-½)	
LNAV/ VNAV DA	764/24		279 (300-½)	
LNAV MDA	840/24	355 (400-½)	840/30	355 (400-¾)
CIRCLING	1000-1 513 (600-1)	1140-1 653 (700-1)	1280-2¼ 793 (800-2¼)	1520-3 1033 (1100-3)