

WAAS CH 50414 W24A	APP CRS 241°	Rwy Ldg TDZE Apt Elev	7001 1007 1009
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24L

JAMES M COX DAYTON INTL (DAY)


RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats RVR to 4500. **RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSRR

MISSED APPROACH:
Climb to 3000 direct
WANSU and on
track 227° to
MIMMS and hold.

ATIS 125.8	COLUMBUS APP CON 118.85 305.2 (091°-180°) 134.45 323.15 (181°-090°)	DAYTON TOWER 119.9 257.7	GND CON 121.9
----------------------	---	------------------------------------	-------------------------

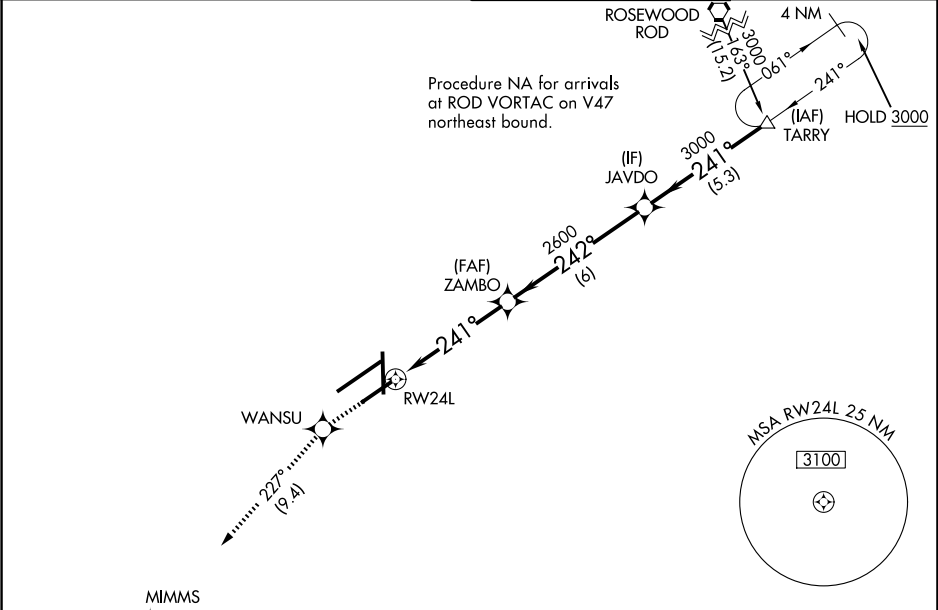

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 54).

tr 227°

* LNAV only.

* 1.2 NM to RW24L

ZAMBO 2600

JAVDO 3000

TARRY 3000

GP 3.00° TCH 50

1.2 3.7 6 5.3

CATEGORY	A	B	C	D
LPV DA**	1207/24 200 (200-½)			
LNAV/VNAV DA	1327/24 320 (400-½)			
LNAV MDA	1440/24 433 (500-½)	1440/40 433 (500-¾)		
CIRCLING	1580-1 571 (600-1)	1580-1½ 571 (600-1½)		1640-2 631 (700-2)

ELEV 1009 **D** TDZE 1007

HIRL all Rwys
TDZL/RCLS Rwy 6L
REIL Rwy 6R and 36

EC-2, 06 AUG 2026 to 03 SEP 2026

EC-2, 06 AUG 2026 to 03 SEP 2026