



ILS or LOC RWY 17C


LOC I-LVC 108.9	APCH CRS 175°	Rwy Idg 9217 TDZE 1278 Arpt Elev 1307	[USAF]	VANCE AFB (KEND)
RNAV or RADAR monitoring required for missed approach.			SALSF 	MISSED APPROACH: Climb to 4000 on END VORTAC R-174 to ADOWS/15 DME and hold.
 *When ALS inv, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1½ miles.				
ATIS ★ 115.4 263.15		APP CON ★ 125.45 343.625 (E) 126.75 346.325 (W)		TOWER ★ 124.05 259.1
				GND CON ★ 121.675 289.4

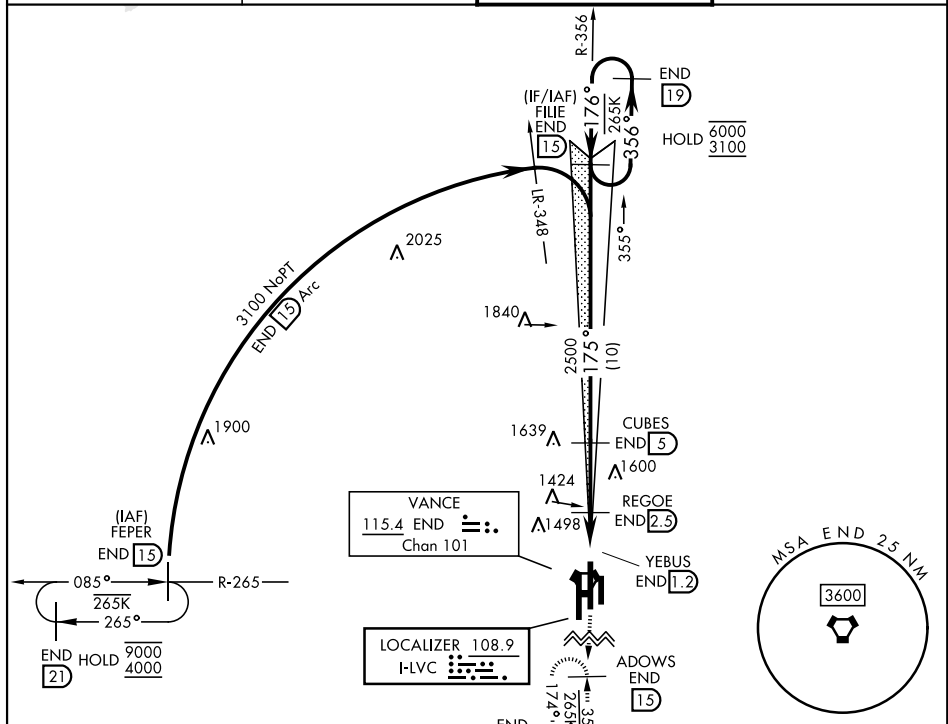

EMERG SAFE ALT 100 NM 4500

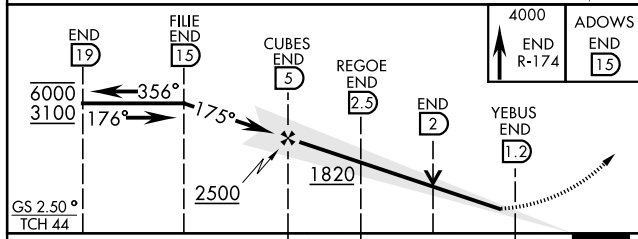

CATEGORY	A	B	C	D	E
S-LS 17C	1478/40		200	(200-34)	
S-LOC 17C *	1680/40	402 (400-34)	1680/50	402	(400-1)
CIRCLING	1760-1	453 (500-1)	1800-1½ 493 (500-1½)	1900-2 593 (600-2)	2400-3 1093 (1100-3)

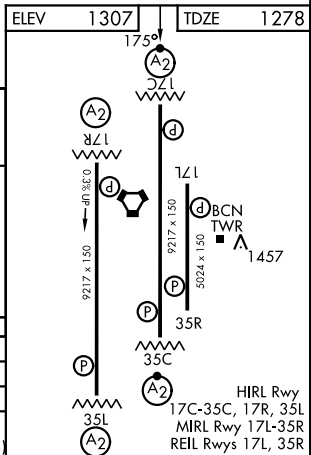

ILS or LOC RWY 17C