

WAAS CH 83734 W35A	APCH CRS 355°	Rwy Idg THRE 1294 Arpt Elev 1307
--------------------------	------------------	--

(USAF)

VANCE AFB (KEND)

RNP APCH-GPS


* When ALS inop, increase RVR to 45, vis to 7/8 mile.
** When ALS inop, increase RVR to 55, vis to 1 mile.




MISSED APPROACH: Climb to 4000 direct
FILIE and hold.

ATIS★ 115.4 263.15	APP CON★ 125.45 343.625 (E) 126.75 346.325 (W)	TOWER★ 124.05 259.1	GND CON★ 121.675 289.4
-----------------------	--	------------------------	---------------------------

For uncompensated
Baro-VNAV systems,
LNAV/VNAV not authorized
below -17°C or above 54°C

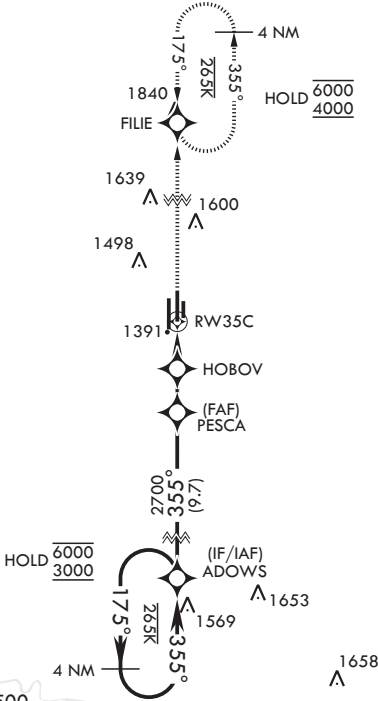

EMERG SAFE ALT 100 NM 4500

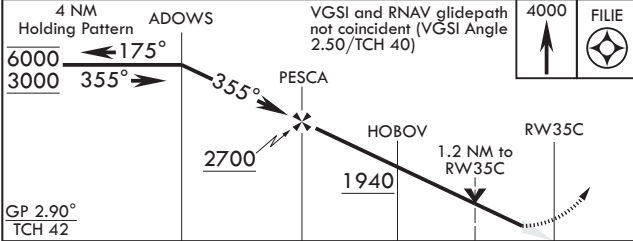

CATEGORY	A	B	C	D	E
LPV DA	1494/40	200	(200-¾)		
LNAV/VNAV DA*	1581/40	287	(300-¾)		
LNAV MDA**	1660/40	366	(400-¾)		
CIRCLING	1760-1 453 (500-1)	1800-1½ 493 (500-1½)	1900-2 593 (600-2)	2400-3 1093 (1100-3)	

