

WAAS CH 87147 W31A	APP CRS 310°	Rwy Ldg TDZE Apt Elev	3038 1159 1167
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 31


ENID WOODRING RGNL (WDG)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using GOK altimeter setting. When local altimeter setting not received, use GOK altimeter setting and increase LPV DA to 1507 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1707 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 1700 then climbing right turn to 4000 direct EDEWO and hold.

AWOS-3PT 123.725	VANCE APP CON ★ 121.3 346.325	WOODRING TOWER ★ 118.9 (CTAF) 257.95	GND CON 121.925
----------------------------	---	--	---------------------------

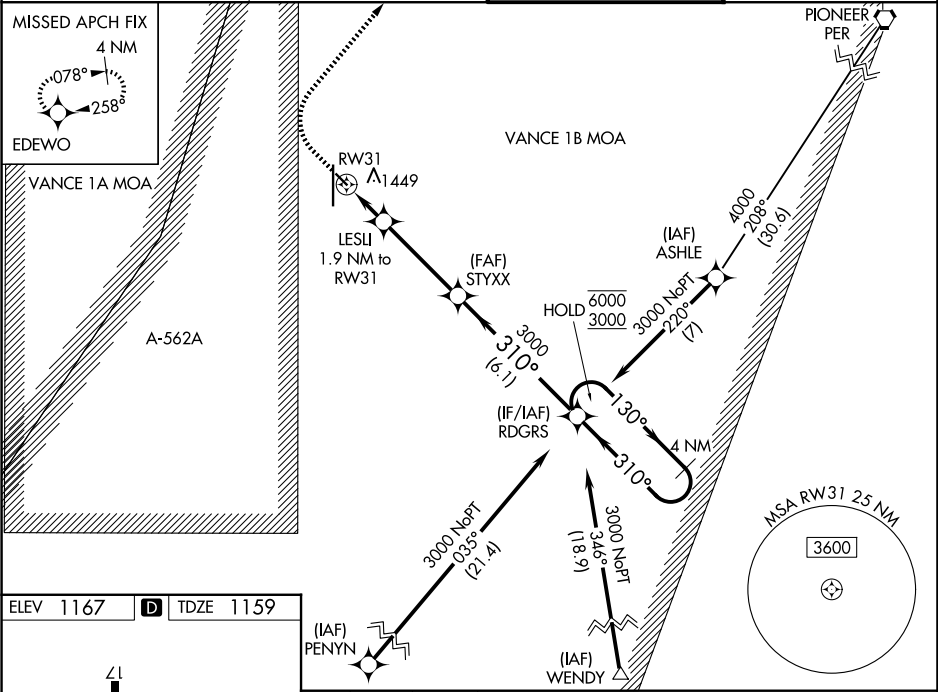

ELEV 1167	D	TDZE 1159
-----------	---	-----------

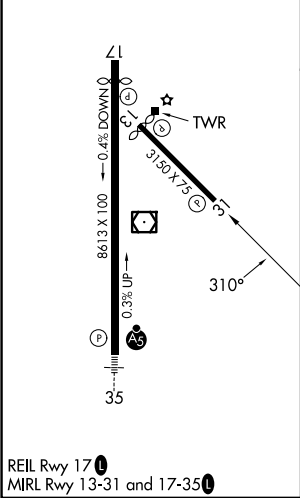

1700 4000 EDEWO			
RW31 1.1 NM to RW31 0.8 NM 3.8 NM 6.1 NM			
STYXX 3000 RDGRS 4 NM Holding Pattern			
LES LI 1.9 NM to RW31 1800 310° 130° 6000 3000 GP 3.00° TCH 40			
CATEGORY	A	B	C
LPV DA	1409-3/4	250 (300-3/4)	NA
LNAV/VNAV DA	1609-1 3/8	450 (500-1 3/8)	NA
LNAV MDA	1560-1 401 (400-1)	1560-1 3/8 401 (400-1 3/8)	NA
CIRCLING	1760-1 593 (600-1)	1820-1 3/4 653 (700-1 3/4)	NA