

WAAS
CH 45549
W16C

APP CRS
163°

Rwy Ldg
TDZE
Apt Elev

6000
581
607

RNAV (GPS) X RWY 16R
SEATTLE PAINE FLD INTL (P.A.E.)


RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
▲ Baro-VNAV and VDP NA when using SEA altimeter setting. When local altimeter setting not received, use SEA altimeter setting and increase LPV DA to 924 feet and all visibilities to RVR 5500. Increase LNAV/VNAV DA to 1090 feet and all visibilities ½ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MALSR

MISSED APPROACH:
Climb to 1100 then climbing right turn to 3000 direct ECEPO and hold, continue climb-in-hold to 3000.

ATIS 128.65	SEATTLE APP CON 128.5 306.9	PAINE TOWER★ 132.95 (CTAF) 256.7	GND CON 121.8 339.8	UNICOM 122.95
----------------	--------------------------------	-------------------------------------	------------------------	------------------

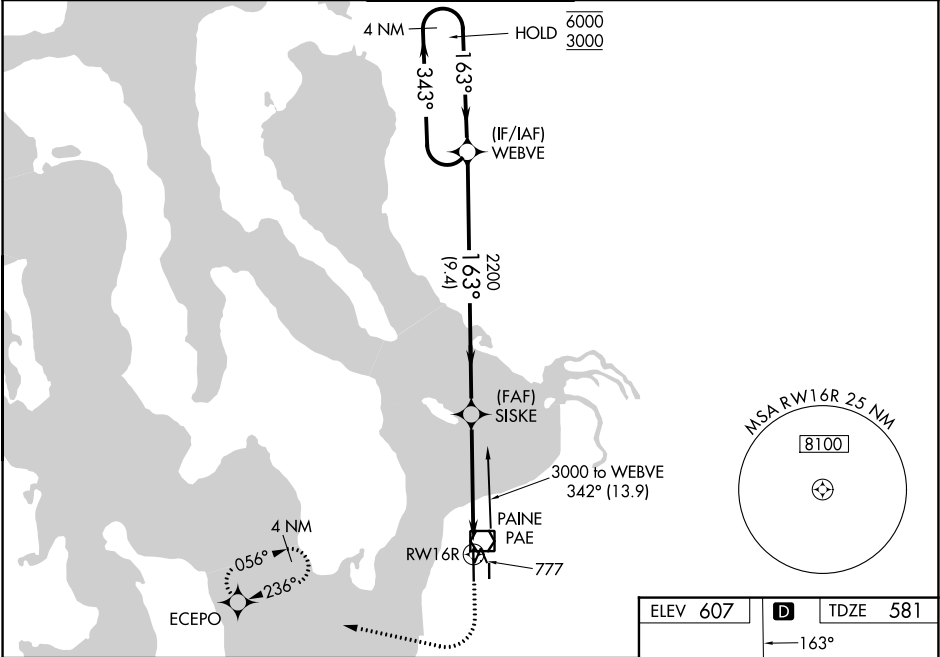

4 NM Holding Pattern

WEBVE

6000
3000

←343°
→163°

GP 3.00°
TCH 57

SISKE

2200

1.6 NM to RWY16R

RWY16R

9.4 NM
3.4 NM
1.6 NM

CATEGORY	A	B	C	D
LPV DA		836/40	255 (300-¾)	
LNAV/VNAV DA		1002-1¼	421 (400-1¼)	
LNAV MDA	1120/55	539 (600-1)	1120-1½	539 (600-1½)
CIRCLING	1120-1	513 (600-1)	1120-1½	1160-2 553 (600-2)

ELEV 607

D

TDZE 581

163°

89 L

TWR

19 L

3004 X 75

34 L

34 R

6000 X 150

TDZL/RCLS Rwy 16R

HIRL Rwy 16R-34L

REIL Rws 16L and 34R

MIRL Rwy 16L-34R