

WAAS CH 65738 W23A	APP CRS 236°	Rwy Ldg TDZE Apt Elev	3035 834 836
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23
SMITH FLD (SMD)


RNP APCH - GPS.




Rwy 23 helicopter visibility reduction below 1 SM NA. Circling to Rwy 13/31 NA at night. When local altimeter setting not received, use FWA altimeter setting and increase all MDAs 40 feet and LNAV visibility Cat C $\frac{1}{8}$ SM and LP visibility Cat C $\frac{1}{8}$ SM.

MISSED APPROACH: Climb to 2700 direct JISUD and on track 294° to WERBU and hold.

AWOS-3 124.55	FORT WAYNE APP CON 127.2 284.6	UNICOM 122.8 (CTAF) 0
-------------------------	--	---------------------------------

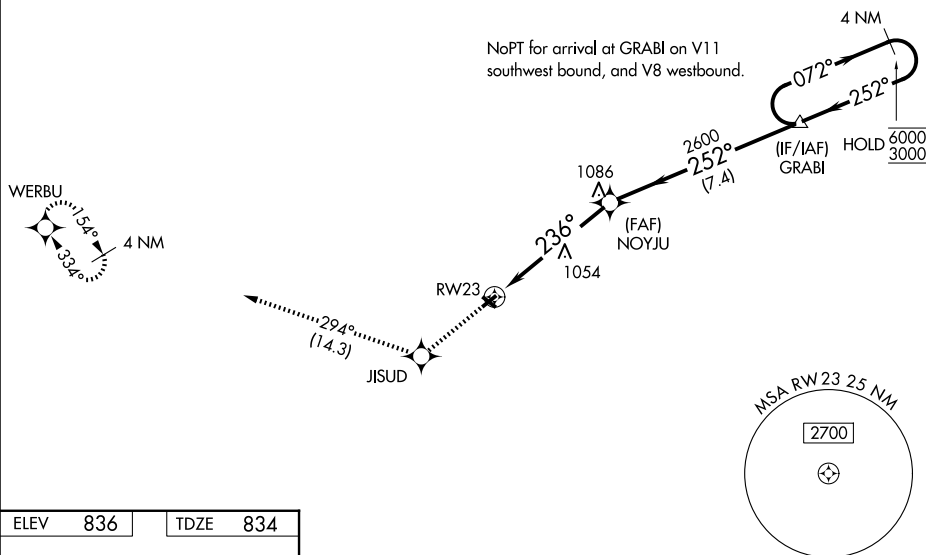

ELEV	836		TDZE	834
------	-----	--	------	-----

MIRL Rwy 5-23 and 13-31 **L**

FORT WAYNE, INDIANA

Amdt 2 17APR25

41°09'N-85°09'W

SMITH FLD (SMD)

RNAV (GPS) RWY 23

EC-2, 06 AUG 2026 to 03 SEP 2026

2700 ↑	JISUD ✱	fr 294°	WERBU ✱	Visual Segment - Obstacles.	4 NM Holding Pattern
CATEGORY	A		B	C	D
LP MDA	1360-1 526 (600-1)		1360-1½ 526 (600-1½)	NA	
LNAV MDA	1400-1 566 (600-1)		1400-1⅝ 566 (600-1⅝)	NA	
CIRCLING	1400-1 564 (600-1)		1940-3 1104 (1200-3)	NA	