



|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>77638</b><br><b>W31A</b> | APP CRS<br><b>313°</b> | Rwy Ldg <b>2821</b><br>TDZE <b>836</b><br>Apt Elev <b>836</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

RNAV (GPS) RWY 31

SMITH FLD (SMD)

|                                                                                                                                                                                                                                                                                                                                                                              |                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| <div><div><div><div></div><div>NA</div><div></div></div><div>-21°C</div></div></div> <div>Rwy 31 helicopter visibility reduction below 1 SM NA. DME/DME RNP-0.3 NA.<br/>Procedure NA at night. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all MDA 40 feet, LP Cat C visibility ¼ SM and LNAV Cat C visibility ½ SM.</div> | MISSED APPROACH: Climb to 2700 direct GRUSS and on track 273° to WERBU and hold. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|

|                         |                                          |                                 |
|-------------------------|------------------------------------------|---------------------------------|
| AWOS-3<br><b>124.55</b> | FORT WAYNE APP CON<br><b>127.2 284.6</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|-------------------------|------------------------------------------|---------------------------------|

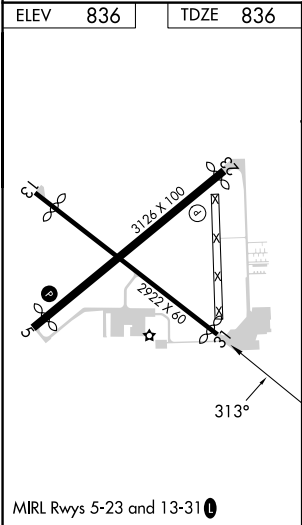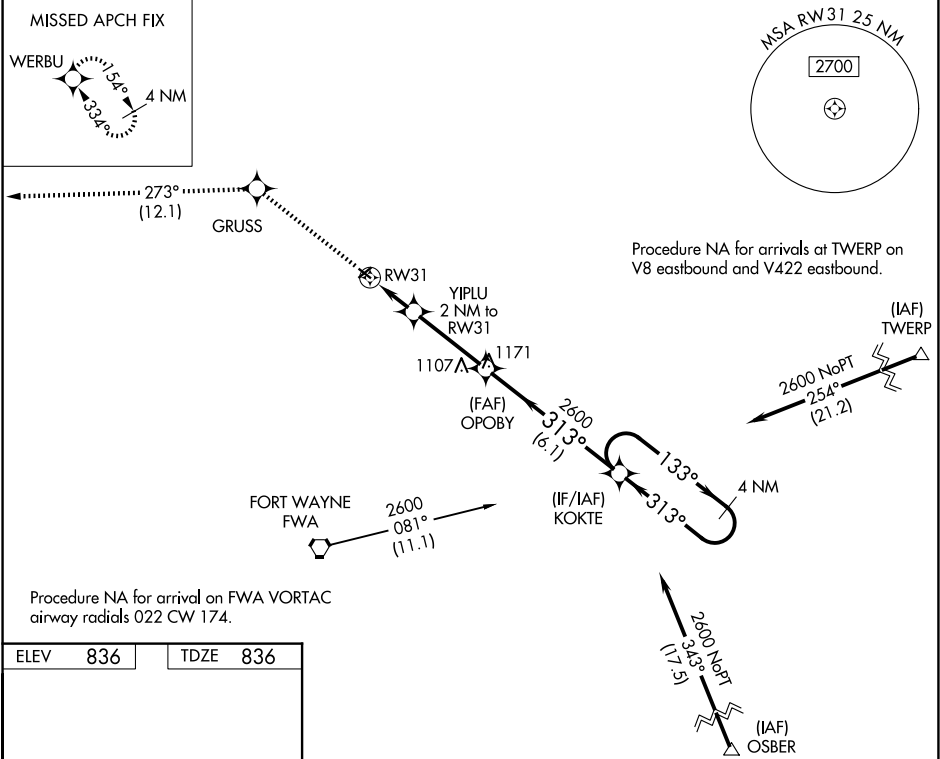

|          |        |             |                           |                             |        |                 |
|----------|--------|-------------|---------------------------|-----------------------------|--------|-----------------|
| 2700     | GRUSS  | tr 273°     | WERBU                     | Visual Segment - Obstacles. |        | 4 NM            |
|          |        |             |                           | OPOBY                       | KOKTE  | Holding Pattern |
|          |        |             | YIPLU 2 NM to RW31        |                             |        |                 |
|          |        |             |                           | 2600                        | 313°   | 133° → 2600     |
|          |        |             |                           |                             | ← 313° |                 |
|          |        |             |                           | 2 NM                        | 3.3 NM | 6.1 NM          |
| CATEGORY | A      | B           | C                         | D                           |        |                 |
| LP MDA   | 1240-1 | 404 (500-1) | 1240-1 ⅓<br>404 (500-1 ⅓) | NA                          |        |                 |
| LNAV MDA | 1260-1 | 424 (500-1) | 1260-1 ¼<br>424 (500-1 ¼) | NA                          |        |                 |
| CIRCLING | 1400-1 | 564 (600-1) | 1940-3<br>1104 (1200-3)   | NA                          |        |                 |