
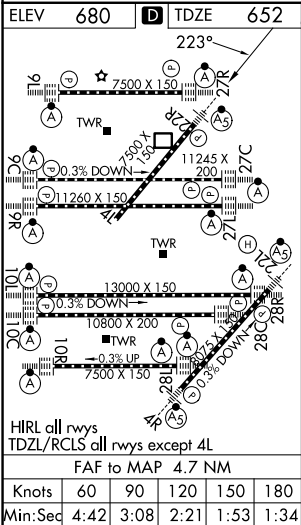


LOC I-RXZ	APP CRS	Rwy Ldg	7300
111.3	223°	TDZE	652
		Apt Elev	680

ILS or LOC RWY 22R

CHICAGO O'HARE INTL (ORD)

RADAR required for procedure entry.		MALSR	MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct DPA VOR/DME and hold.
	Simultaneous approach authorized. DME from GCO DME.		
D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON (TWR CENTER) 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)
135.4 282.225	119.0 292.125	126.9 348.0	121.75 (OBND) 121.9 (BND)

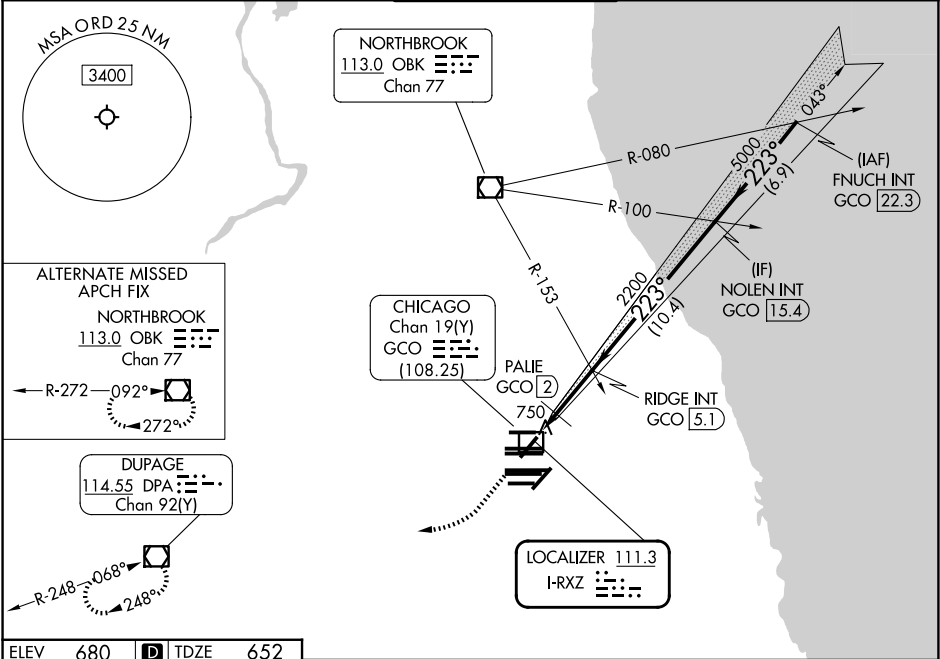

1300 ↑		4000 		DPA 		VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 69°).			
CATEGORY	A		B		C		D		
S-ILS 22R	852/18 200 (200-½)								
S-LOC 22R	1220/24		568 (600-½)		1220-1¼		568 (600-1¼)		
CIRCLING	1220-1		540 (600-1)		1220-1⅝ 540 (600-1⅝)		1460-2½ 780 (800-2½)		
PALIE FIX MINIMUMS									
S-LOC 22R	980/24		328 (300-½)		980/26		328 (300-½)		
CIRCLING	1220-1		540 (600-1)		1220-1½ 540 (600-1½)		1460-2½ 780 (800-2½)		