

WAAS CH 69508 W27B	APP CRS 273°	Rwy Ldg 7500 TDZE 664 Apt Elev 680
--	------------------------	---

RNAV (GPS) RWY 27R
CHICAGO O'HARE INTL (ORD)

RNP APCH.

RADAR required for procedure entry.

T Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.


ALSF-2




MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON (TWR CENTER)
135.4 282.225	119.0 292.125	128.15 348.0	121.75 (OBND)
			121.9 (IBND)
			118.05 (TWR SOUTH)
			226.675 (ALL TWRS)
			118.05 (TWR NORTH)

MISSED APCH FIX
NORTHBROOK
OBK
092°
272°
9 NM

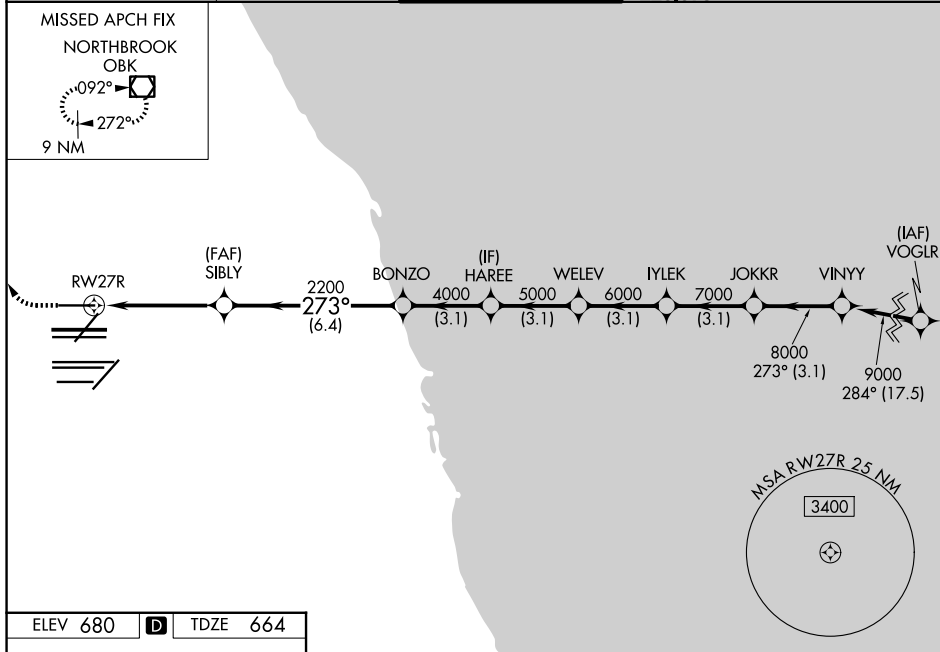

ELEV 680	D	TDZE 664
----------	----------	----------

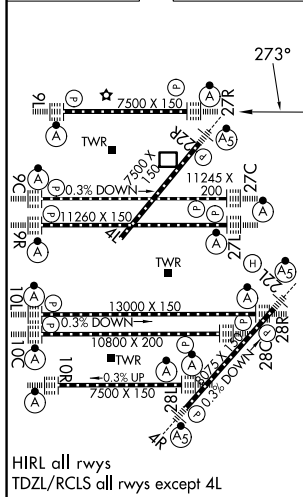

1100 ↑	4000 ↗	OBK 										
* LNAV only.												
CATEGORY			A		B		C			D		
LPV DA					864/18		200 (200-½)					
LNAV/ VNAV DA					961/24		297 (300-½)					
LNAV MDA			1120/24		456 (500-½)		1120/45			456 (500-¾)		