



APP CRS	Rwy Ldg	11260
273°	TDZE	654
	Apt Elev	680


RNAV (RNP) Y RWY 27L

CHICAGO O'HARE INTL (ORD)

RNP AR APCH - GPS.			ALSIF-2 	MISSED APPROACH: Climb to 4000 on track 273° to WASCO and hold.
 Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.				
D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 126.9 348.0	GND CON (TWR NORTH) 124.125 (TWR SOUTH) 118.05 (ALL TWRs) 226.675	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)

RADAR REQUIRED

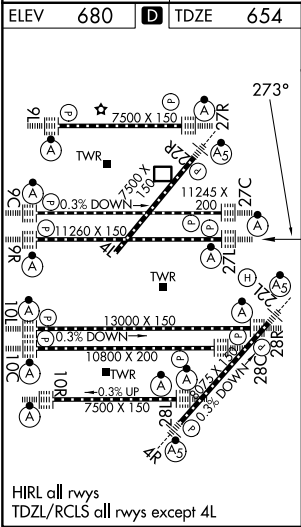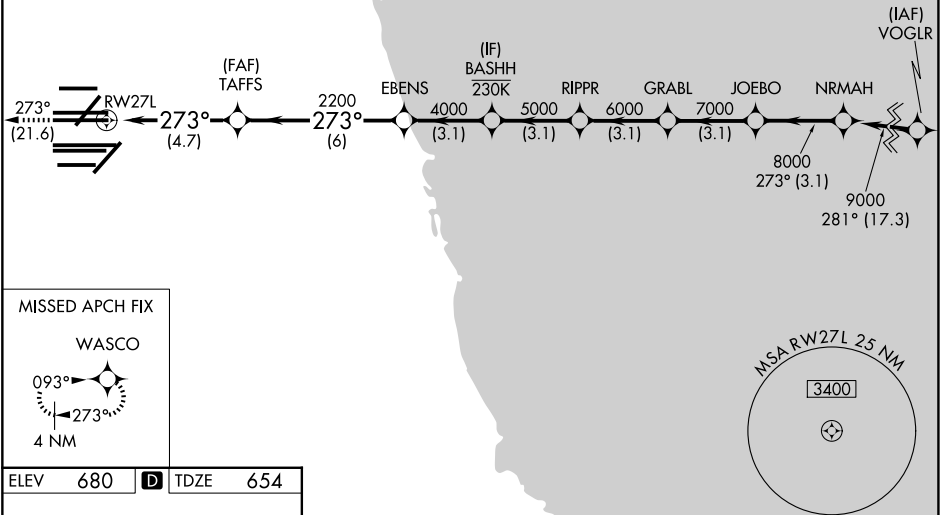

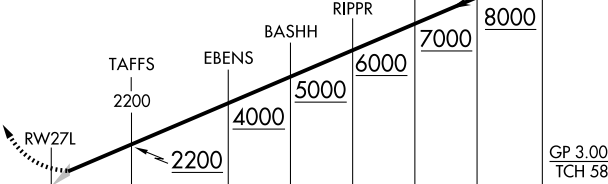4000	tr 273°	WASCO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).					NRMAH	
								9000	
CATEGORY			A		B		C		D
RNP 0.15 DA			989/26		335 (400-½)				
RNP 0.30 DA			1133/50		479 (500-1)				

AUTHORIZATION REQUIRED