

WAAS CH 99340 W10E	APP CRS 093°	Rwy Ldg TDZE Apt Elev 7500 680 680
--	------------------------	--

RNAV (GPS) Z RWY 10R


CHICAGO O'HARE INTL (ORD)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cat C and D visibility to RVR 6000.

ALSIF-2

MISSED APPROACH: Climb to 1200 then climbing right turn to 4000 direct DPA VOR/DME and hold.

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 133.0 348.0	GND CON (TWR NORTH) 124.125 (TWR SOUTH) 118.05 (ALL TWRS) 226.675	(TWR CENTER) 121.75 (OBND) (IBND) 121.9
--------------------------------	---	------------------------------------	---	--

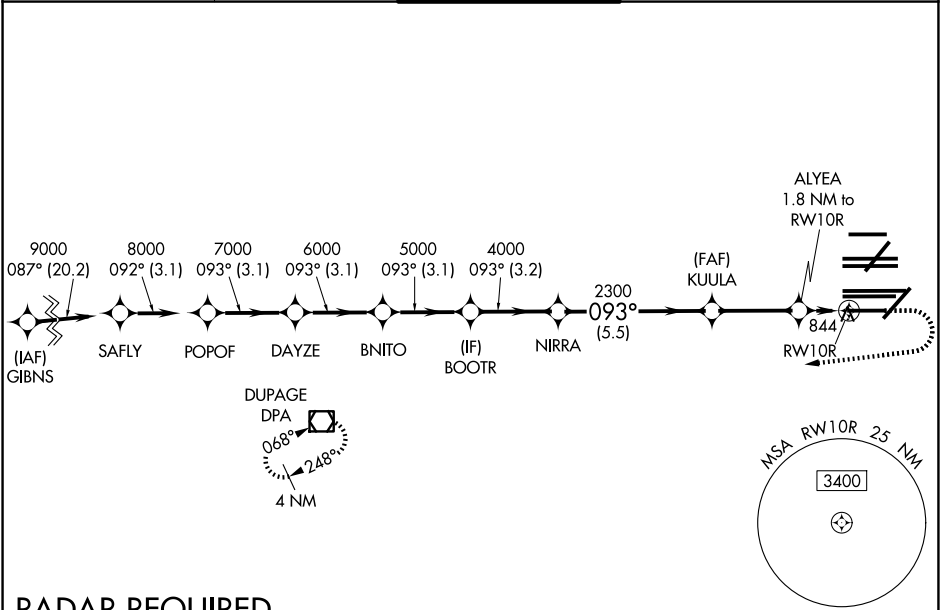

RADAR REQUIRED										ELEV 680	D	TDZE 680
SAFLY POPOF DAYZE BNITO BOOTR NIRRA KUULA ALYEA GP 3.00° TCH 55 9000 8000 7000 6000 5000 4000 2300 1300 1200 4000 DPA *LNAV only 092° 093° 1.8 NM to RW10R *1.1 NM to RW10R 3.1 NM 3.1 NM 3.1 NM 3.1 NM 3.2 NM 5.5 3.1 NM 0.7 1.1 NM 3.1 NM												

EC-3, 06 AUG 2026 to 03 SEP 2026

EC-3, 06 AUG 2026 to 03 SEP 2026