



WAAS CH 65837 W28D	APP CRS 273°	Rwy Ldg TDZE 667 Apt Elev 680
--	------------------------	---

RNAV (GPS) Z RWY 28L

CHICAGO O'HARE INTL (ORD)

RNP APCH.	ALSIF-2	MISSED APPROACH: Climb 1200 then climbing left turn to 4000 direct CGT VORTAC and hold.
Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19C or above 54C. Use of FD or AP required during simultaneous operations.		

D-ATIS 135.4 282.225	CHICAGO APP CON 119.0 292.125	O'HARE TOWER 133.0 348.0	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)
--------------------------------	---	------------------------------------	---	---

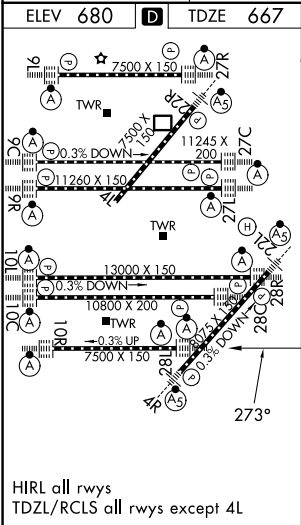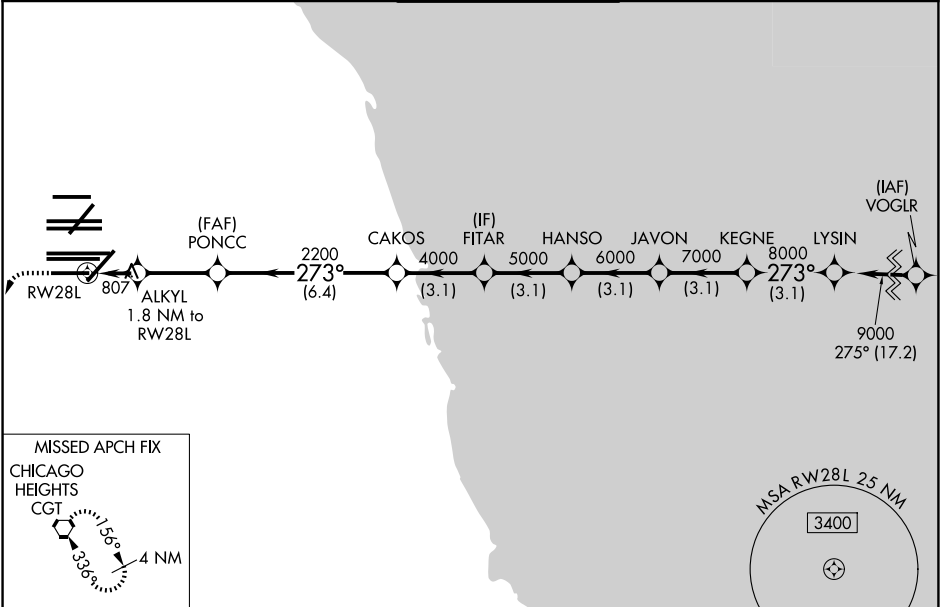

ELEV 680	TDZE 667
*LNAV only.	
ALKYL 1.8 NM to RW28L	
*1.1 NM to RW28L	
RW28L	
*1280 2200	
1.1 NM 0.7 2.9 NM 6.4 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM	
CATEGORY	A B C D
LPV DA	867/18 200 (200-1/2)
LNAV/VNAV DA	1090/40 423 (500-3/4)
LNAV MDA	1060/24 393 (400-1/2) 1060/35 393 (400-5/8)