

APP CRS
230°

Rwy Ldg	11200
TDZE	783
Apt Elev	796

RNAV (RNP) Z RWY 23R
INDIANAPOLIS INTL (IND)

V For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS Required. For inoperative ALS, increase RNP 0.15 all Cats visibility to RVR 6000 and increase RNP 0.30 all Cats visibility to 1 3/8 SM. Simultaneous approach authorized.

MALSR



MISSED APPROACH:
Climb to 1200 then
climbing right turn to
3000 direct KEADY
and hold.

D-ATIS
134.25

INDIANAPOLIS APP CON
128.175 317.8


INDY TOWER
120.9 251.1

GND CON
121.9


CLNC DEL
128.75 251.1

CPDLC

RADAR required for arrivals at TRAAK.

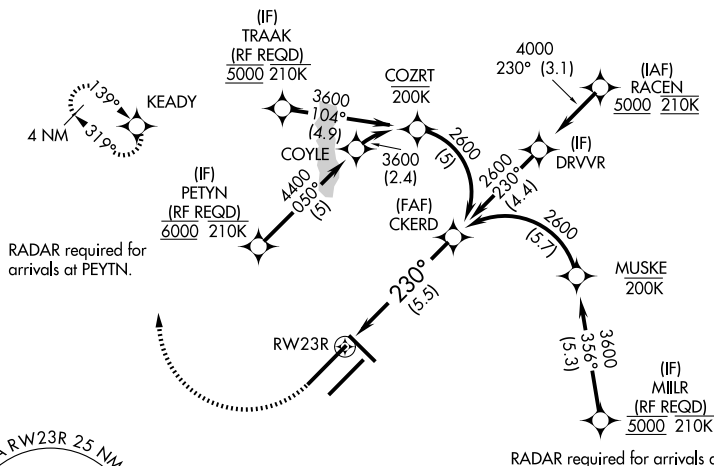

RADAR required for arrivals at MILLR.




1200

3000

KEAD

See planview for multiple IF locations.


VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

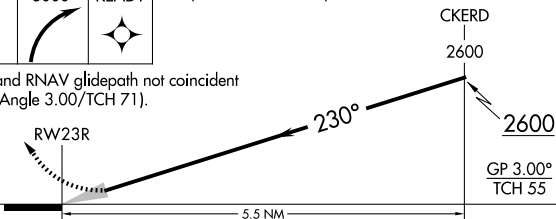

CATEGORY	A	B	C	D
RNP 0.15 DA		1147/40	364 (400-3/4)	
RNP 0.30 DA		1206/50	423 (500-1)	

AUTHORIZATION REQUIRED

ELEV	796	D	TDZE	783
------	-----	----------	------	-----



HIRL all Rwy's
TDZ/CL Rwy's 5L and 5R

RNAV (RNP) Z RWY 23R