

APP CRS	Rwy Ldg	11200
050°	TDZE	747
	Apt Elev	796

RNAV (RNP) Z RWY 5L

INDIANAPOLIS INTL (IND)

For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS required. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM. Simultaneous approach authorized.

ALSF-2



MISSED APPROACH:
Climbing left turn to
3000 direct KEADY
and hold.

D-ATIS
134.25


INDIANAPOLIS APP CON
128.175 317.8

INDY TOWER
120.9 251.1


GND CON
121.9

CLNC DEL
128.75 251.1

CPDLC

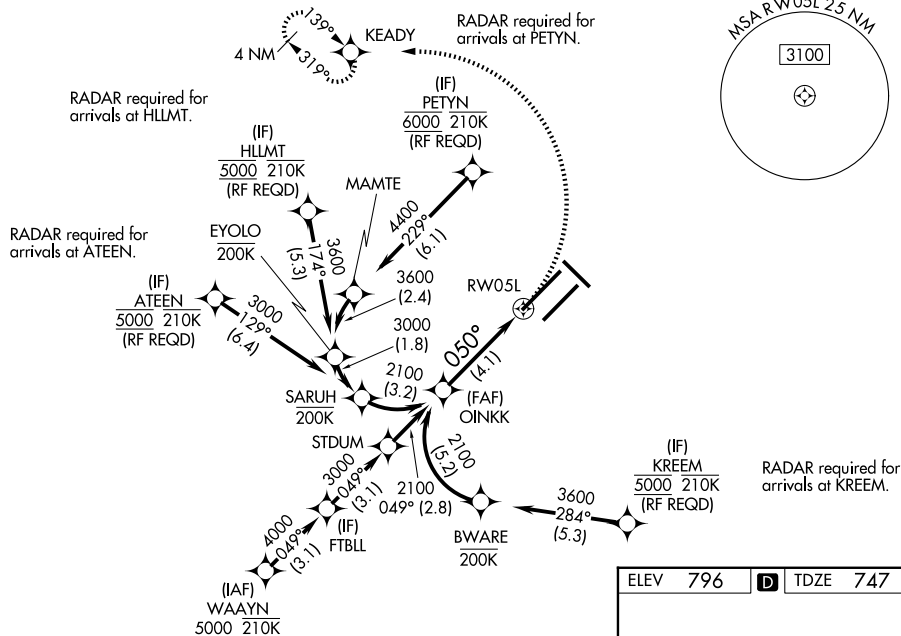

ELEV	796	D	TDZE	747
------	-----	----------	------	-----

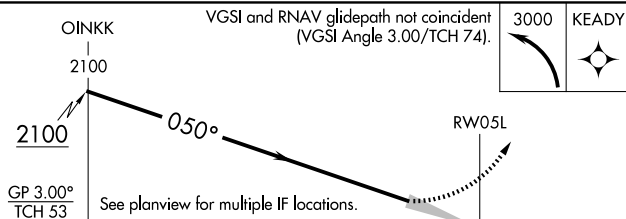

CATEGORY	A	B	C	D
RNP 0.30 DA	1197/60 450 (500-1¼)			

AUTHORIZATION REQUIRED

HIRL all Rwy's
TDZ/CL Rwy's 5L and 5R

INDIANAPOLIS, INDIANA

Amdt 2 10NOV16

39°43'N-86°18'W

INDIANAPOLIS INTL (IND)

RNAV (RNP) Z RWY 5L

EC-2, 06 AUG 2026 to 03 SEP 2026