

WAAS CH 45706 W05A	APP CRS 050°	Rwy Ldg 11200 TDZE 747 Apt Elev 796
--	------------------------	--

RNAV (GPS) Y RWY 5L

INDIANAPOLIS INTL (IND)

T
A


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inoperative ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM and increase LNAV Cat C/D visibility to 1½ SM.

11252




MISSED APPROACH:
Climb to 1300 then
climbing left turn to
3000 direct KEADY
and hold.

D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 251.1	GND CON 121.9	CLNC DEL 128.75 251.1	CPDLC
------------------	---------------------------------------	---------------------------	------------------	--------------------------	-------

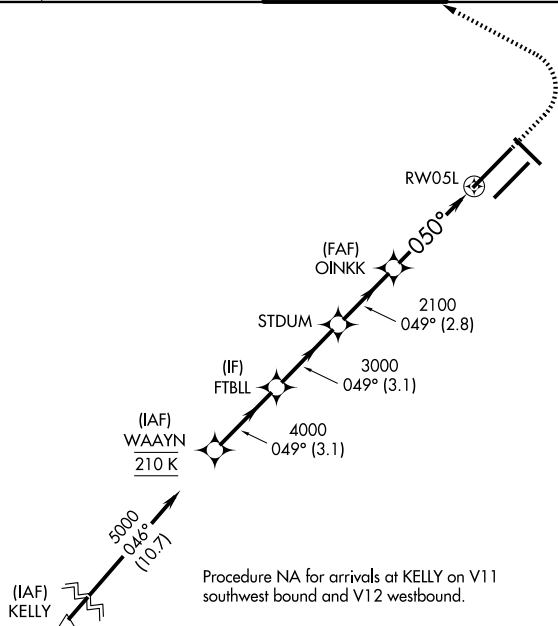

MISSED APCH FIX




Procedure NA for arrivals at KELLY on V11 southwest bound and V12 westbound.

EC-2, 06 AUG 2026 to 03 SEP 2026

EC-2, 06 AUG 2026 to 03 SEP 2026

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 74).

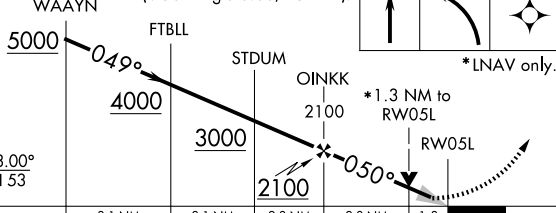

		3.1 NM		3.1 NM		2.8 NM		2.8 NM		1.3	
CATEGORY		A				B		C		D	
LPV	DA	947/18 200 (200-½)									
LNAV/ VNAV	DA	1136/45 389 (400-¾)									
LNAV	MDA	1220/24 473 (500-½)						1220/50 473 (500-1)			
CIRCLING		1420-1 624 (700-1)				1420-1¾ 624 (700-1¾)			1560-2½ 764 (800-2½)		

INDIANAPOLIS, INDIANA

Amdt 4A 17AUG17

INDIANAPOLIS INTL (IND)

39°43'N-86°18'W

RNAV (GPS) Y RWY 5L