

WAAS CH 56416 W34A	APP CRS 339°	Rwy Ldg TDZE 322 Apt Elev 341
--	------------------------	---


RNAV (GPS) RWY 34

HAWKINS FLD (HKS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Jackson-Medgar Wiley Evers Intl altimeter setting. When local altimeter setting not received, use Jackson-Medgar Wiley Evers Intl altimeter setting and increase all DA 19 feet and all MDA 20 feet. Increase LPV and LNAV/VNAV all Cts visibility ½ mile and Circling Cat C visibility ¼ mile. Rwy 34 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2000 direct
OCARO and hold.

ASOS 120.625	JACKSON APP CON ★ 123.9 319.2	HAWKINS TOWER ★ 119.65 (CTAF) 0 257.8	GND CON 121.9 239.0	CLNC DEL 121.9 (When twr closed)	UNICOM 122.95
------------------------	---	---	-------------------------------	---	-------------------------

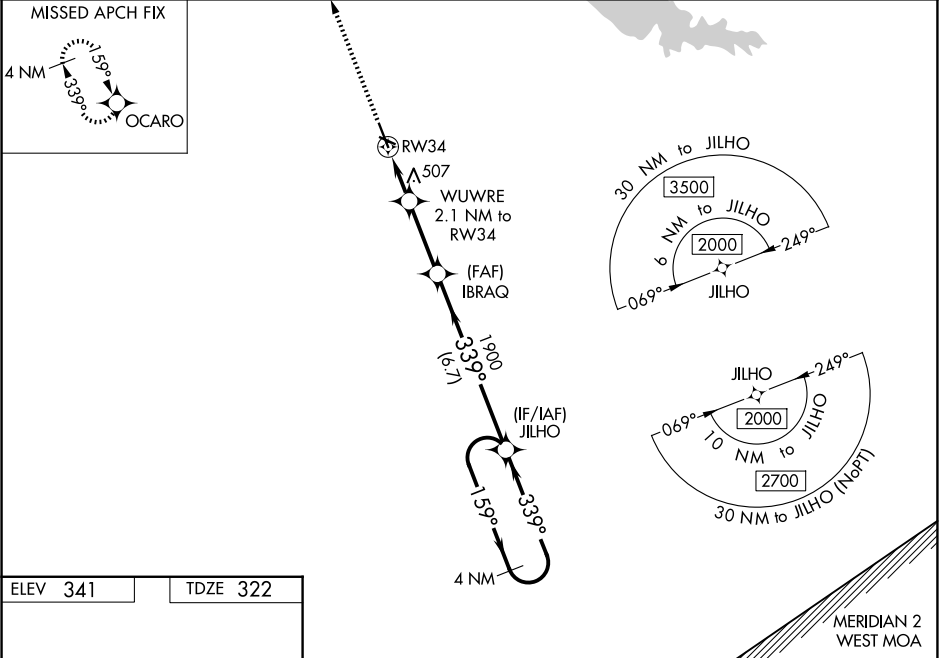

2000		OCARO		JILHO	
*LNAV only.		WUWRE 2.1 NM to RW34		IBRAQ 1900	
RW34		*1.3 NM to RW34		JILHO 2000	
1000*		1900		GP 3.00°	
1.3 NM		0.8		2.8 NM	
6.7 NM		4 NM Holding Pattern		TCH 40	
CATEGORY	A	B	C	D	
LPV DA	588-7/8		266 (300-7/8)		
LNAV/VNAV DA	670-1 1/8		348 (400-1 1/8)		
LNAV MDA	760-1	438 (500-1)	760-1 3/8	438 (500-1 3/8)	
CIRCLING	860-1 519 (600-1)	880-1 539 (600-1)	1140-2 1/4 799 (800-2 1/4)	1320-3 979 (1000-3)	

SC-4, 06 AUG 2026 to 03 SEP 2026

SC-4, 06 AUG 2026 to 03 SEP 2026