

WAAS
CH 70611
W04B

APP CR5
046°

Rwy Ldg	7200
TDZE	260
Apt Elev	266

RNAV (GPS) RWY 4R
BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)

RNP APCH-GPS.

▼ Rwy 4R helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, INAV/VNAV NA below -15°C or above 54°C.

▲ Simultaneous approach authorized. INAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LPV all Cats visibility to RVR 4500. INAV/VNAV all Cats visibility to 1% SM and INAV Cat A/B visibility to RVR 5500 and Cat C/D to 1% SM.

MALSR




MISSED APPROACH:
Climb to 2900 direct
RIRIW and on track 047°
to BRAUM and hold.

D-ATIS
125.65



LITTLE ROCK APP CON
135.4 353.6

ADAMS TOWER
118.7 257.8

GND CON
121.9 339.8

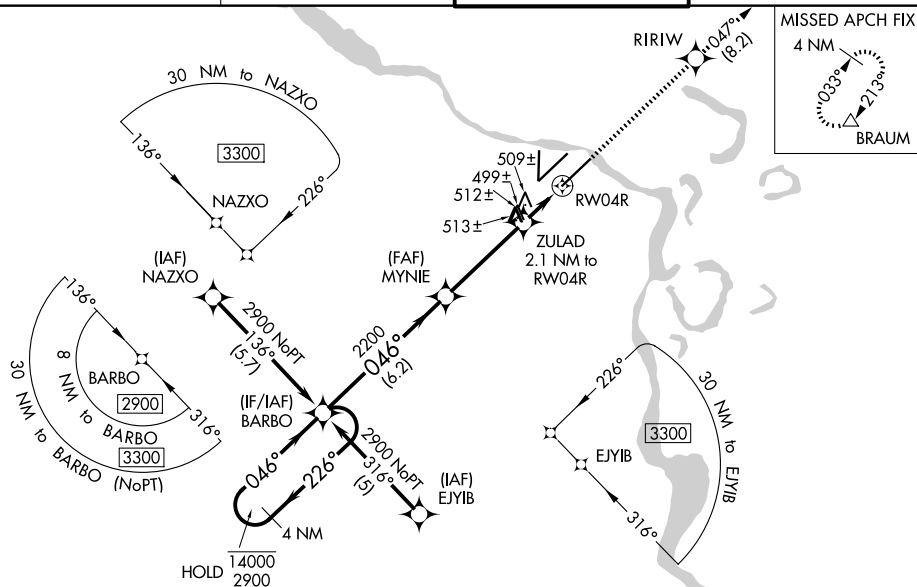

ELEV 266		TDZE 260
----------	---	----------

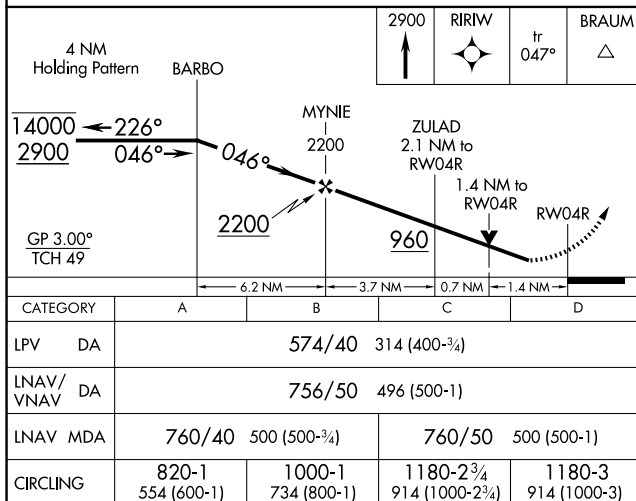

MIRL Rwy 18-36
HIRL Rwy 4R-22L and 4L-22R
TDZL/RCLS Rwy 22R