

APP CRS	Rwy Ldg	11134
251°	TDZE	104
	Apt Elev	128


RNAV (RNP) Z RWY 25R
LOS ANGELES INTL (LAX)

For uncompensated Baro-VNAV systems, procedure NA below 5°C (41°F) or above 54°C (130°F). Simultaneous approach authorized. Simultaneous approach authorized with HHR. GPS required. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 2000 on track 251° to ZIMRU and track 188° to CATLY and hold.

D-ATIS	SOCAL APP CON	LOS ANGELES TOWER	GND CON
133.8	124.3 363.2 (APCH from W) 124.9 269.0 (090°-224°) 124.5 235.975 (225°-044°) 128.5 360.7 (045°-089°)	133.9 239.3 (N) 120.95 379.1 (S)	121.65 327.0 (N) 121.75 327.0 (S) 121.4 327.0 (W)

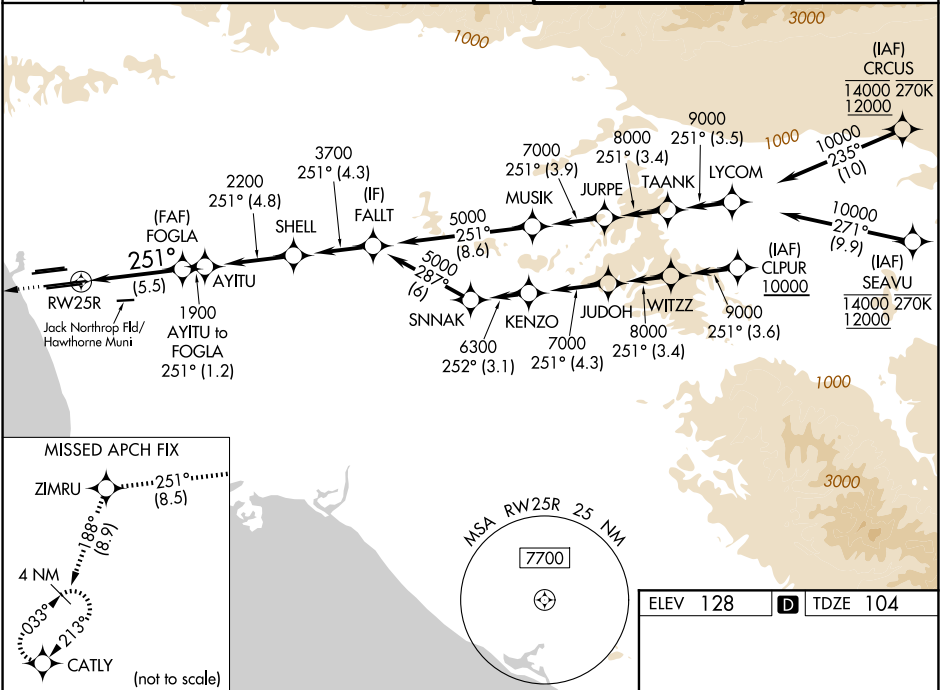

2000 tr 251°

ZIMRU tr 188°

CATLY

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 75).

FOGLA 1900

AYITU 2200

GP 3.00° TCH 54

5.5 NM 1.2 NM

CATEGORY	A	B	C	D
RNP 0.11 DA		453/40	349 (400-¾)	
RNP 0.30 DA		544/50	440 (500-1)	

AUTHORIZATION REQUIRED

ELEV 128 TDZE 104

TDZ/CL Rwy 6R, 7L, 24R, and 25L

HIRL all Rwy's

SW-3, 06 AUG 2026 to 03 SEP 2026

SW-3, 06 AUG 2026 to 03 SEP 2026